

Vandal Dome Camera

Gen-II TVI

CT-2MW-OV21AF



TECHNICAL SPECIFICATION:


Vandal Dome Camera	CT-2MW-OV21AF
Resolution	1080p over Coax
Image Sensor	1/3" CMOS
Day/Night Functionality	Yes w/ICR
Lens Type	2.8~12mm VF Lens, Auto-focus, Remote-focus Lens
True WDR	120dB
Angle of View	81°(W) ~ 23°(T)
IR LEDs	32
IR LEDs Distance	Up to 50ft.
Electronic Shutter	1/30 ~ 1/6000 Sec
Minimum Illumination	1.0 Lux (Color), 0.001 Lux (IR LEDs On)
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
Protection Grade	IP66
General Information	CT-2MW-OV21AF
Operating Temperature	14° F ~ 122° F
Operating Humidity	Within 80% RH
Power Consumption	14W / 1 Amp (LEDs On), 8W / 500mA (Camera Only)
Input Voltage	12VDC / 24VAC Dual Voltage

*Specifications are subject to change without any prior notice.

KEY FEATURES:

- 1080p HD-TVI
- 60fps WDR Sensor, 120dB
- Dual BNC Outputs: TVI & Analog
- 2.8~12mm AF
- Auto-focus
- Day-Night w/ IR LEDs
- OSD Joystick
- UTC
- DC12V/AC24V
- For Indoor & Outdoor
- IP66 Rated

DIMENSIONS (INCH:MM):

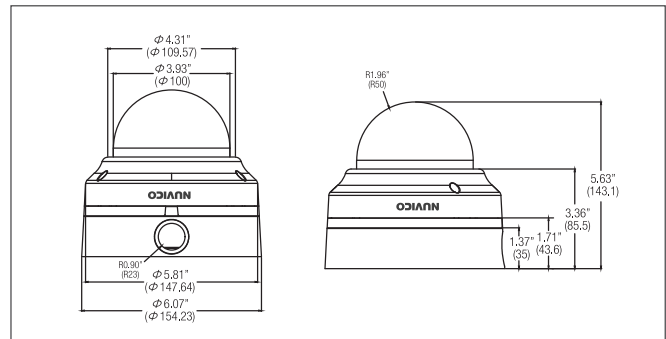

CONSTRUCTION:

- Service Monitor Output - SD Analog(CVBS)
- External Lens Adjustments
- Outdoor / Metal Housing


MOUNTING ACCESSORIES:

- EA-WM200 / Wall Mount
- EA-JB200 / Junction Box

APPLICABLE PRODUCTS:

- ED-C400HD
- ED-C800HD
- ED-C1600HD
- ED-U1600HD
- ED-U3200HD

MOUNTS TO:

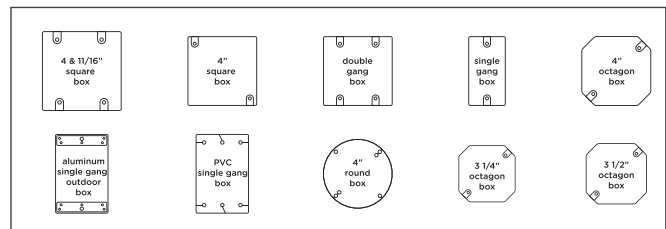

ACCESSORIES:



EA-WM200

EA-JB200

NUVICO®

Corporate Headquarters | sales@nuvico.com • T 866-523-1700 201-541-1605
International Operations | export@nuvico.com • T 82-31-712-8814

NUVICO © Copyright 2014 Version 4.06 | Designs and specifications are subject to change without notice. Preliminary Specification.

Customer Service | cs@nuvico.com
Technical Support | techsupport@nuvico.com