

## CT-2M-B21AF



### TECHNICAL SPECIFICATION:

| Bullet Camera           | CT-2M-B21AF                                     |
|-------------------------|-------------------------------------------------|
| Resolution              | 1080p over Coax                                 |
| Image Sensor            | 1/3" CMOS                                       |
| Day/Night Functionality | Yes w/ICR                                       |
| Lens Type               | 2.8~12mm VF Lens, Auto-focus, Remote-focus Lens |
| Angle of View           | 81°(W) ~ 23°(T)                                 |
| IR LEDs                 | 42                                              |
| IR LEDs Distance        | Up to 150ft.                                    |
| Electronic Shutter      | 1/30 ~ 1/6000 Sec                               |
| Minimum Illumination    | 1.0 Lux (Color), 0.001 Lux (IR LEDs On)         |
| Service Monitor Output  | 1.0 Vp-p Composite, 75 ohm                      |
| General Information     | <b>CT-2M-B21AF</b>                              |
| Operating Temperature   | 14 °F ~ 122 °F                                  |
| Operating Humidity      | Within 80% RH                                   |
| Power Consumption       | 14W / 1 Amp (LEDs On), 8W / 500mA (Camera Only) |
| Input Voltage           | 12VDC / 24VAC Dual Voltage                      |

\*Specifications are subject to change without any prior notice.

### KEY FEATURES:

- 1080p HD-TVI
- Dual BNC Outputs: TVI & Analog
- 2.8~12mm
- Day-Night w/ IR LEDs
- OSD Joystick
- UTC
- DC12V/AC24V
- For Indoor & Outdoor
- Auto-focus

### CONSTRUCTION:

- Service Monitor Output - SD Analog(CVBS)
- External Lens Adjustments
- Outdoor / Ivory Housing


### MOUNTING ACCESSORIES:

- CB-JB2 / Junction Box
- EA-JB200 / Junction Box

### APPLICABLE PRODUCTS:

- ED-C400HD
- ED-C800HD
- ED-C1600HD
- ED-U1600HD
- ED-U3200HD

### DIMENSIONS (INCH:MM):

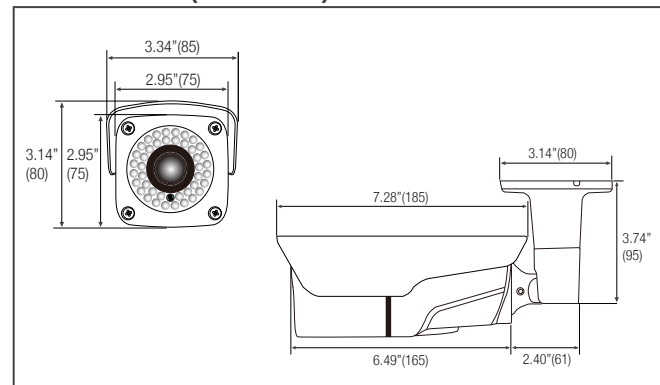

### ACCESSORIES:



CB-JB2

EA-JB200