

CT-2MW-E21AF



TECHNICAL SPECIFICATION:


EyeBall Camera	CT-2MW-E21AF
Resolution	1080p over Coax
Image Sensor	1/3" CMOS
Day/Night Functionality	Yes w/ICR
Lens Type	2.8~12mm VF Lens, Auto-focus, Remote-focus Lens
True WDR	120dB
Angle of View	81°(W) ~ 23°(T)
IR LEDs	36
IR LEDs Distance	Up to 100ft.
Electronic Shutter	1/30 ~ 1/6000 Sec
Minimum Illumination	1.0 Lux (Color), 0.001 Lux (IR LEDs On)
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
General Information	CT-2MW-E21AF
Operating Temperature	14 °F ~ 122 °F
Operating Humidity	Within 80% RH
Power Consumption	14W / 1 Amp (LEDs On), 8W / 500mA (Camera Only)
Input Voltage	12VDC / 24VAC Dual Voltage

*Specifications are subject to change without any prior notice.

KEY FEATURES:

- 1080p HD-TVI
- 60fps WDR Sensor, 120dB
- Dual BNC Outputs: TVI & Analog
- 2.8~12mm AF
- Day-Night w/ IR LEDs
- OSD Joystick
- UTC
- DC12V/AC24V
- For Indoor & Outdoor
- Auto-focus

DIMENSIONS (INCH:MM):

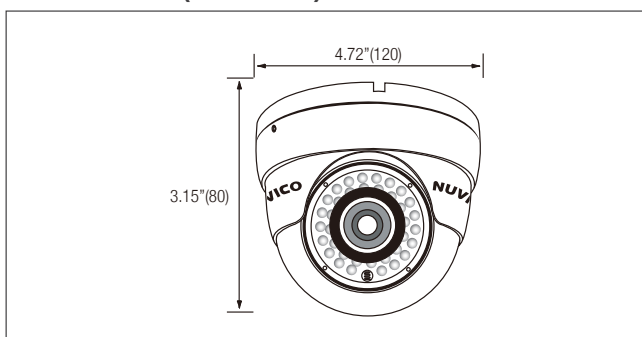

CONSTRUCTION:

- Service Monitor Output - SD Analog(CVBS)
- External Lens Adjustments
- Outdoor / Metal Housing

MOUNTING ACCESSORIES:

- EA-WM200 / Wall Mount
- EA-JB200 / Junction Box

APPLICABLE PRODUCTS:

- ED-C400HD
- ED-C800HD
- ED-C1600HD
- ED-U1600HD
- ED-U3200HD

ACCESSORIES:



EA-WM200

EA-JB200