

HYDRA HD™ Vandalproof 12X mini PTZ HC-MPOV12

Specification

HD 1080p

HYDRA



KEY FEATURES:

- 1/2.8" CMOS Sensor
- 2MP (1080p)
- 12x A/F Optical Zoom (4.8mm~57.6mm), 16x Digital Zoom
- Day/Night Functionality with ICR
- IP66 rated
- Digital Noise Reduction: DNR
- WDR
- Auto White Balance: AWB
- Built-in Fan & Heater
- Built-in PoE / 24VAC
- Remote Zoom/Focus Control from HYDRA HD™ Recorders


CONSTRUCTION:

- 4" Polycarbonate Bubble
- Surface Mount Housing (Standard)
- Impact Resistant Dome w/ Aluminum Housing
- Weatherproof - IP66
- Aluminum Mounting Accessories (Optional)
- Built-in Fan & Heater
- Compact Size

AVAILABLE MODELS:

- EA-WM100: Outdoor Wall Mount

DIMENSIONS (INCH:MM):


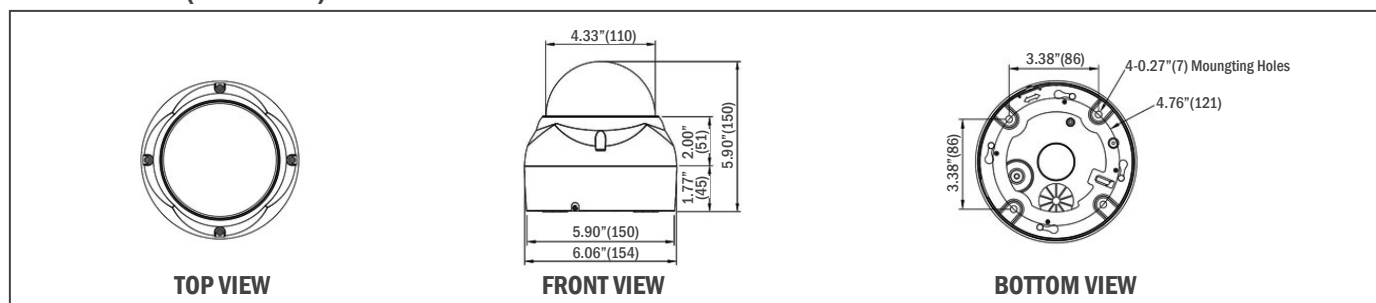


TECHNICAL SPECIFICATION:

HYDRA HD™ Vandalproof Dome	HC-MPOV12
Resolution	2MP (1080p)
Image Sensor	1/2.8" CMOS
Day/Night Functionality	Yes w/ ICR
Lens Type	12X A/F Optical
Video Compression	H.264 / MJPEG
Frame Rate	60pps
Feature	WDR, AWB, BLC, DVR
Security	Password Protection, IP Filtering, HTTPS, SSL
Pan Range	360° Continuous
Pan Speed	Preset: Max. 380°/sec, Manual: Max. 380°/sec
Tilt Range	180° (0°~180°)
Tilt Speed	Preset: Max. 380°/sec, Manual: Max. 380°/sec
Preset	240
Audio In/Out	In x 1 / Out x 1 (G.711)
Alarm In/Out	In x 1 / Out x 1
RS485	RS485
Ethernet	10/100Mbps
General Information	HC-MPOV12
Operating Temperature	-22°F to 122°F (-30°C ~ 50°C)
Power Consumption	1.5A (22W) @ 24VAC
Input Voltage	PoE, 24VAC

*Specifications are subject to change without any prior notice

AVAILABLE ACCESSORIES:

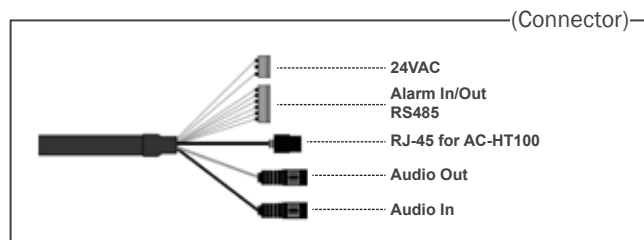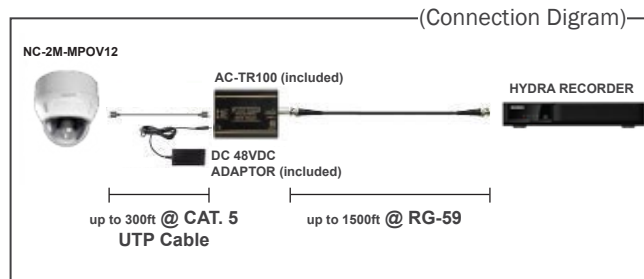

NUVICO®

Corporate Headquarters | sales@nuvico.com • T 866-523-1700 201-541-1605
International Operations | export@nuvico.com • T 82-31-712-8814

NUVICO © Copyright 2014 Version 4.06 | Designs and specifications are subject to change without notice. Preliminary Specification.

Customer Service | cs@nuvico.com
Technical Support | techsupport@nuvico.com