



3 Mounting the EasyView2

1. Mounting the legacy EasyView 2 is slightly different in that, the EasyView 2 is also modular by design. Following the illustration to the right, mount the base first.
2. Then, mount the camera as you would a standard flush mount dome camera feeding the cable through the center, and not through the pipe hole on the side.
3. Roughly point the lens to the general area of interest, then loosely screw on the dome cover.

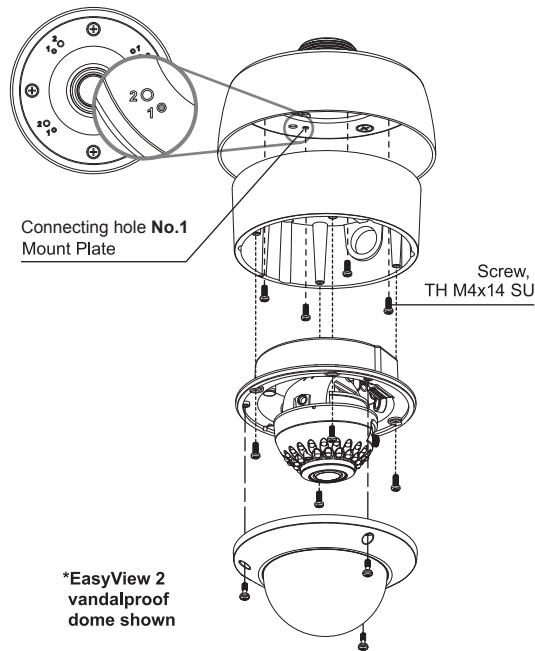

JOINING THE WALL MOUNT BRACKET TO THE ASSEMBLED PENDANT MOUNT

1. Making sure that the Pendant Seal is attached to the Pendant Mount, join the cables from the two separated sections.
2. Feed the cable slack back into the bracket hole, then join the Wall Mount Bracket to the Pendant Mount by rotating the locknut clockwise until the two sections are securely fastened.
3. Open the loosely covered dome cover, then make the final lens adjustments. Once complete, close the dome cover and tighten the cover screws.

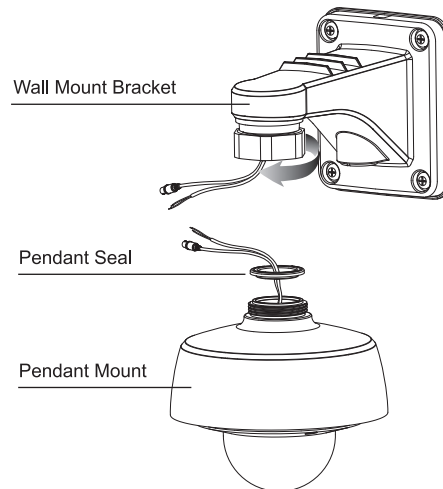

Pendant Mount Bracket | EA-WM100

INSTALLATION GUIDE

Using This Guide

Each of the compatible cameras and brackets are numbered in the Features section below. Follow the mounting instructions based on the number assigned to the camera you wish to mount.

FEATURES


This Pendant Mount Bracket(EA-WM100) is designed to be used with the following models and can also be used for both indoor and outdoor application.

EasyView2. (Use hole No.1)

EasyNet vandalproof dome. (Use hole No.2)

EasyTrack Mini PTZ. (Use hole No.2)

EasyView Lite vandalproof dome. (Use hole No.3 or 2 depending on housing style)



ASSEMBLY ACCESSORIES

Camera Mounting Screws

PH M6x10 SU

Q'ty : 4



Bracket Mounting Screws

BH T1 6x50 SU

Q'ty : 4



Pipe Cap

Q'ty : 1



Pendant Seal

Q'ty : 1



Rubber Gasket

Q'ty : 1



TH M4x14 SU

Q'ty : 4



Plastic Anchors

D6

Q'ty : 4





SPECIFICATION

Construction	Aluminum Die-casting
Finish	Light-gray Sand-tone Spray
Environment	Indoor/Outdoor
Weight	2.16 lb (0.98Kg)


DIMENSIONS

Unit: Inches (mm)

Pendant Mount

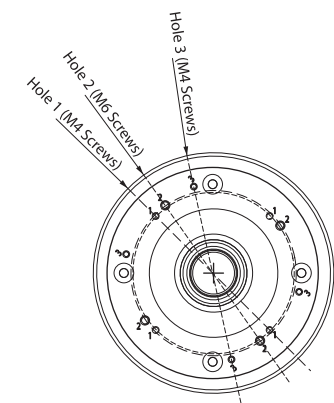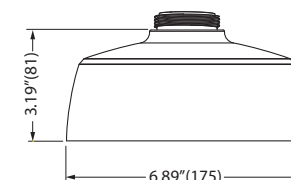


Wall Mount Bracket

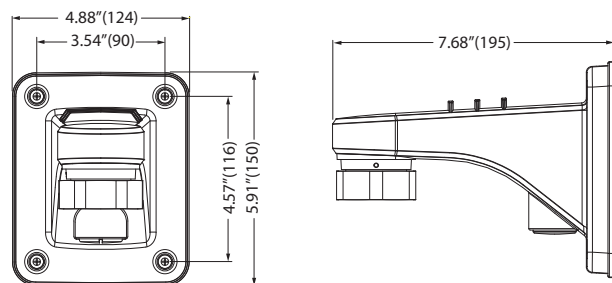

INSTALLING THE WALL MOUNT BRACKET TO THE WALL


1. Using the Wall Mount Bracket as a template, mark the 4 holes where the plastic anchors will go. Then, install the anchors at the desired location.

2. Feeding the cables from the wall through the center of the bracket, affix the Wall Mount Bracket to the wall using the screws supplied.

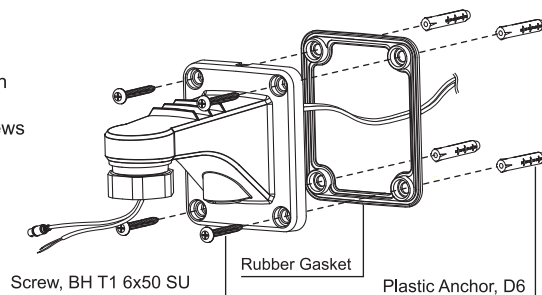

Installing to the Junction Box

Alternatively, the Pendant Mount Bracket can be joined to the Junction Box for easy future access. Please refer to the illustration on the right for mounting instructions.

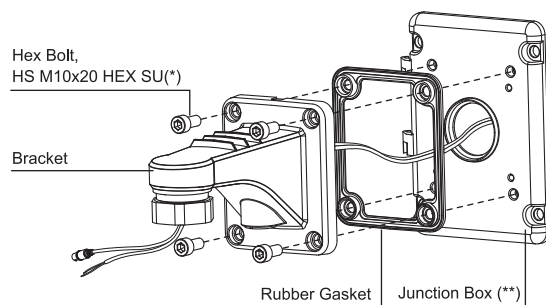

(*) Included in the junction box package

(**) Refer to the junction box instruction manual for the junction box installation


INSTALLING THE CAMERA TO THE PENDANT MOUNT

1 Typical Camera Mounting Method

EasyNet vandalproof dome.
(Use hole No.2)

EasyView Lite vandalproof dome.
(Use hole No.3 or 2 depending on housing style)

1. Remove the dome cover of the desired camera to expose the mounting holes. Then, choose the appropriate mounting screws based on the camera model you wish to mount. (For EasyNet vandalproof dome camera, insert all 4 screws past the rubber screw catch)
2. Feeding the camera cables through the center of the Pendant Mount, install the camera base to the Mount Plate using the appropriate screws already picked out.
3. Roughly point the lens to the general area of interest, then loosely screw on the dome cover.

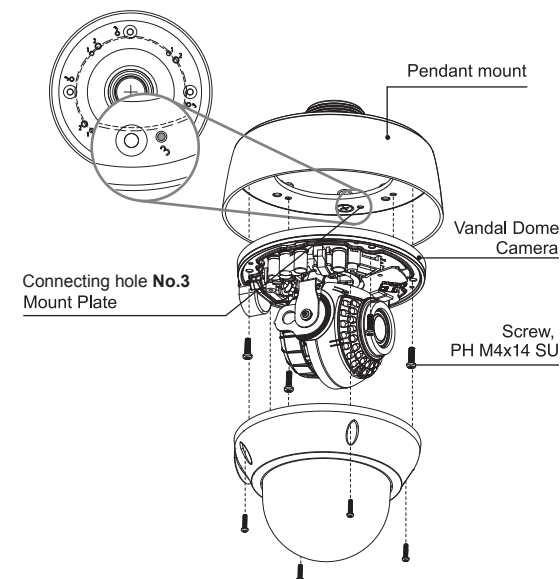

2 Mounting the EasyTrack Mini PTZ Camera

DO NOT OPEN THE PTZ CAMERA!

The EasyNet PTZ is designed to be mounted as is. The mounting Adapter Plate is supplied with your mini PTZ purchase.

1. To mount the PTZ, you must uninstall the Adapter Plate and reinstall to the Pendant Mount first.
2. Adapter Plate is located at the underside of the camera. To remove it, first remove the lock screw on the outside of the housing. Then, turn just the plate counter-clockwise to dismount the plate from the camera.
3. Install the Adapter Plate with indents facing down towards the Pendant Mount using the screws indicated on the right.
4. Feeding the cables through the center of the Pendant Mount lower the camera gently inside. Firmly gripping the Pendant Mount housing, rotate the PTZ counter-clockwise until the camera is securely fastened.

