

Dome Camera

4MP IP Camera

NC-4M-OV31AF




KEY FEATURES:

- 4MP High resolution
- 3D DNR/D-WDR
- Triple streams
- 3.3~10.5mm, Motorized Lens
- Auto focus: Motorized VF lens
- Alarm/Audio
- Built-in PoE/12VDC
- Reset button

DIMENSIONS

Unit: Inches (mm)

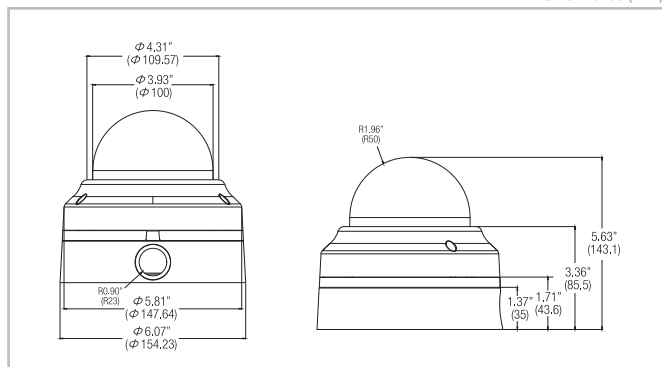

TECHNICAL SPECIFICATIONS

Product Model	HD Auto Focus Lens IP Camera
Sensor	1/3" 4.0Mega progressive scan CMOS
Min. illumination	Colour:0.01Lux/F1.2: 0Lux/F1.2(IR ON)
Lens	3.3~10.5mm Motorized lens
IR distance	50 M
Electronic shutter	Auto(1/25s-1/10000s Adjustable)
Day/Night	Auto/Color / B&W (IR_CUT)
Noise Reduction	2D/3D Digital Noise Reduction
Anti-fog	Support
WDR	Digital WDR
Image Adjustment	Sharpness, Brightness, Saturation, Contrast Adjustable
	H.264, H.265
Encoding Type	MainProfile: H.264:High Profile/Main Profile/BaseLine Profile
Record Resolution	Main Stream:2560*1440@20fps
	Sub Stream: 704*576@20fps
	Third Stream: 1280*720@15fps
Video Bitrate Control	Support VBR/CBR
Video Bitrate Range	32Kbps ~ 8Mbps
Audio	1 Audio Input: 1 Audio Output
Alarm	1 Alarm Input: 1 Alarm Output
Reset Button	Built-in reset button
Network Interface	RJ45 10M/100M adaptive Ethernet interface
Motion Detetion	Multiple detection zones, variable sensitivity levels
ROI	Support
Corridor Mode	Support
Privacy Masking	Four zones for privacy masking
Snapshot	JPEG capture, capture resolution is the max coding resolution
Alarm	Support network anomaly, mask alarm and etc
Mobile APP	IOS, Andriod
Network Function	TCP/IP: UDP: HTTP: IGMP: ICMP: DHCP: RTP/RTSP: DNS
	DDNS: FTP: NTP: PPPOE: UPNP: SMTP: SNMP
Protocol	Support ONVIF and CGI protocol
Protection Grade	IP66
PoE	Support
Power	DC 12V
Operation Temperature	-10°C ~ +60°C
Operation Humidity	10% ~ 90%
Power Supply	10W MAX
Weight	1200g

*Specifications are subject to change without any prior notice.