

Outdoor Wall Mount | SD-WL

INSTALLATION INSTRUCTION

FEATURES



This Outdoor Wall Mount (SD-WL) is designed to work with the Outdoor Housing Enclosure (SC-OH), and together, they complete the Pendant Mount housing design suitable for both indoor and outdoor application. The SD-WL features wire feed-through design, which keeps the installation neat and clean, but also secure the camera cables from unwanted vandalism and harsh environments. The SD-WL also has a small access panel that can be uncovered for easy cable connections.

Assembly Accessories


This Outdoor Wall Mount (SD-WL) does not require any assembly.

Specification

Construction	Aluminum
Finish	Light-gray polyester powder coat.
Max. Load	45 lb (20Kg)
Environment	Indoor/outdoor
Dimension	Unit: Inches (mm)

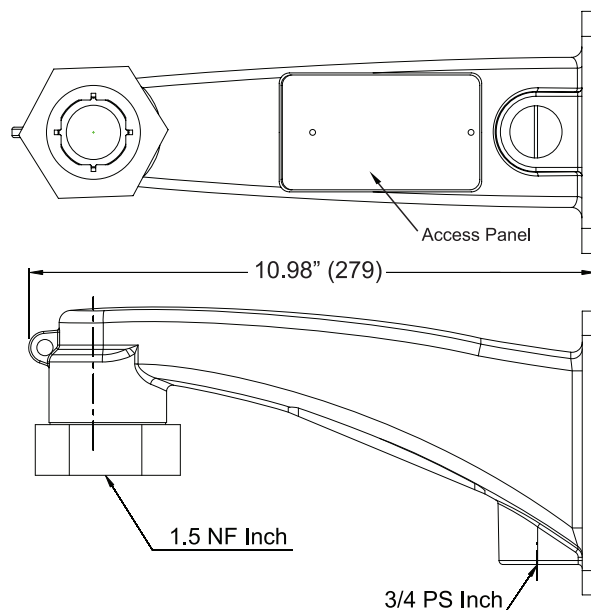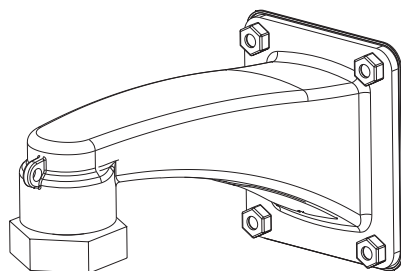

Side View

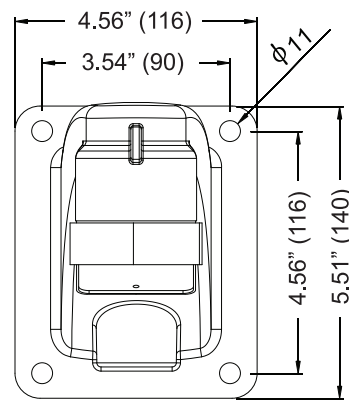

Front View

HOW TO INSTALL

1. Please make sure that the anchor bolts are securely fastened to the wall before proceeding with the Outdoor Wall Mount installation. Please refer to the dimensional diagram to the left for anchor bolt hole spacings.



2. Once the Outdoor Wall Mount (SD-WL) is secured to the anchor bolts on the wall, uncover the small access panel located at the bottom near the base, and pull the cables (power, comm., alarm, etc) from the wall through to the access panel.

3. Take the EasyTrak™ SC-S Series PTZ dome camera and secure the safety wire to the loop hole located at the front tip of the Outdoor Wall Mount.

4. Feed the cable wires (power, comm., alarm, etc) through the center of the Outdoor Wall Mount hole and out through the access panel.

5. Once the cable gland cap reaches the top and is flush inside the free-rotating universal nut, rotate the nut clockwise and join the Outdoor Wall Mount (SD-WL) and the Outdoor Housing (SC-OH) together.

6. Join all the cable wires (power, comm., alarm, etc) together at the access panel, then place all the loose wire inside the Outdoor Wall Mount. Close the access panel with the two philips screws provided.

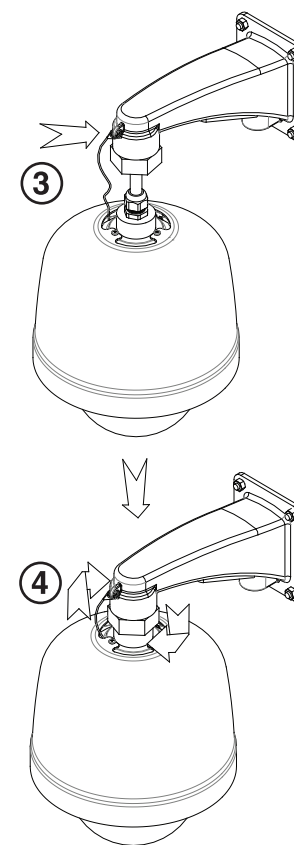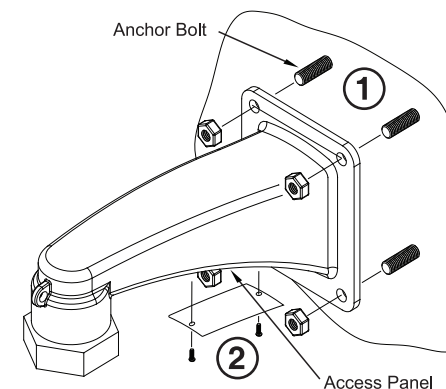

NUVICO®

Tel: 201-541-1605 Fax: 201-541-1620
Email: techsupport@nuvico.com
www.nuvico.com

Version 1.2
Printed In Korea