

Analog Indoor Dome Camera

CD-D21N-L

Specification



KEY FEATURES:

- 1/3" CCD Sensor
- 700 TV Lines
- 2.8~12mm, DC Auto Iris Lens
- Day/Night Functionality w/ICR
- 30 IR LEDs
- Built-in IR LED On/Off Switch
- Smart IR - Automatic Intensity Adjustment
- 0.2 Lux (Color), 0.00 Lux (B/W, IR LEDs On)
- DNR: Digital Noise Reduction
- AWB: Automatic Tracking White Balance
- HLC: High Light Compensation (BMB)
- DWDR: Digital Wide Dynamic Range
- 12VDC/24VAC


CONSTRUCTION:

- 3" Polycarbonate Bubble
- 3-Axis Dimbal
- Ivory Plastic Housing
- Compact Size

AVAILABLE MODELS:

- CD-D21N-L: 2.8~12mm, Day/Night, 30 IR LEDs

ACCESSORIES:

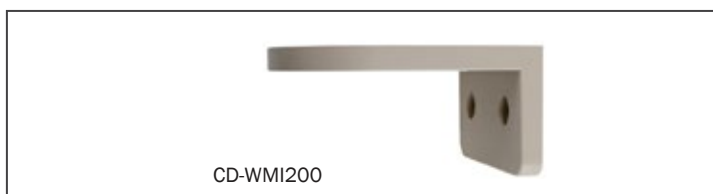


TECHNICAL SPECIFICATION:

Technical Specification	CD-D21N-L
Video Format	NTSC
Image Sensor	1/3" CCD
Horizontal Resolution	700 TV Lines
Day/Night Functionality	Yes w/ ICR
Lens Type (DC Auto Iris)	2.8 ~ 12mm Vari-focal Lens
Angle of View	81° (W) ~ 23° (T)
IR LEDs	30
IR LEDs Distance	Up to 50ft
LEDs Illumination Angle	80°
Sync System	Internal
Effective Pixels (HxV)	768(H) x 494(V)
Scanning System	525 Lines. 2:1 Interlaced
Electronic Shutter	1/60 sec.
Main Video Output	1.0 Vp-p Composite, 75 ohm
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
Minimum Illumination	0.2 Lux (Color), 0.00 Lux (B/W, IR LEDs On)
S/N Ratio	More than 48dB (AGC Off)
General Information	CD-D21N-L
Operating Temperature	23°F ~ 113°F (-5°C ~ +45°C)
Operating Humidity	Within 90% RH
Power Consumption	1Amp (LED On), 500mA (Camera Only)
Input Voltage	12VDC/24VAC Dual Voltage

*Specifications are subject to change without any prior notice.

DIMENSIONS (INCH:MM):

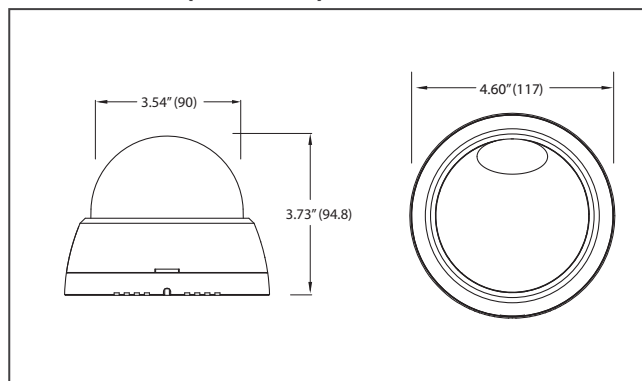

SMART IR LEDs GET YOU COVERED:

Tired of "hotspots" or too much IR reflection? Our new EasyView™ Lite dome cameras have got it covered - Smart IR LEDs.

All our EasyView™ Lite dome cameras come equipped with Smart IR LED technology that detects too much IR reflection and automatically compensates by decreasing the intensity. Smart.

