

Outdoor Housing I SC-OH

INSTALLATION INSTRUCTION

FEATURES


This Outdoor Housing (SC-OH) enclosure is designed to work with the various mounting options available, such as the Outdoor Mount (SD-WL), Pedestal Mount (SD-PM), Parapet Mount (SD-PPM), and the I-Beam Mount (SD-IMB) making the EasyTrak™ PTZ speed dome suitable for either indoor or outdoor application.

Assembly Accessories

This Outdoor Wall Mount (SC-OH) does not require any assembly.

Specification


Construction	Aluminum, Acrylic Plastic
Finish	Light-gray Polyester Powder Coat.
Max. Load	45 lb (20Kg)
Environment	Indoor/Outdoor
Net Weight	6.6 lb (3Kg)
Power Source	24VAC
Power	Heater 50W
Consumption	Blower 3W
	Dome Camera 40W
Temperature	(-40°C ~ 50°C)
	Heater On: At 41°F (5°C)
	Heater Off: At 59°F (15°C)
	Fan On: 24Hours
Dimensions	Unit: Inches (mm)

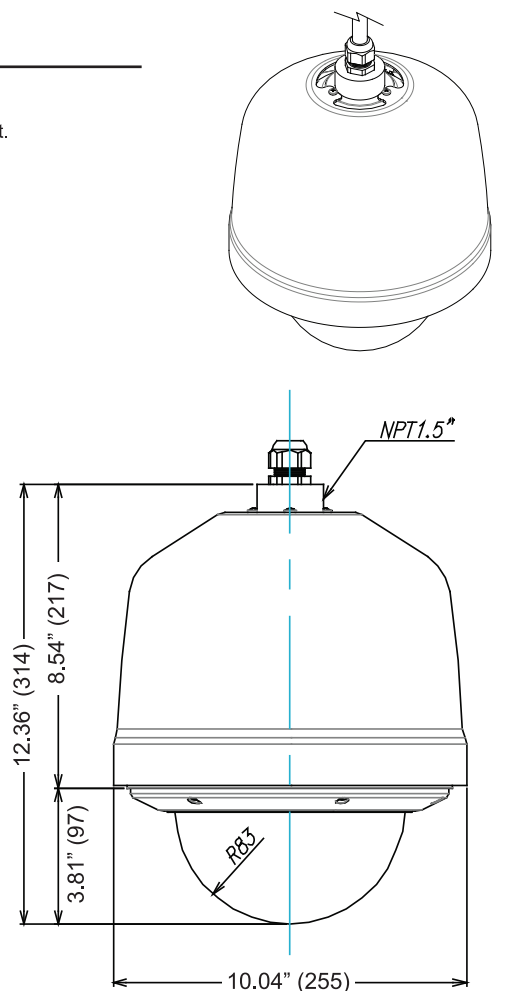

(Over)


HOW TO INSTALL

1. First, make sure that the mounting hardware is securely installed on the wall (SD-WL only). Then pull the cables (power, comm., alarm, etc) running to the wall through the Mount, out of the access panel so that the cables are now exposed.
(**Note:** With all other PTZ mounts, assembly must be done on the ground first.)
2. Take the Outdoor Housing (SC-OH) and secure the safety cable to the loop at the front tip of the SD-WL. Then feed the cables through the center of the Mount and out through the access panel.
3. Once the cable gland cap reaches the top and is flush inside the free-rotating universal nut, rotate the nut clockwise and join the Outdoor Wall Mount (SD-WL) and the Outdoor Housing Enclosure (SC-OH) together.
4. Join all the cable wires (power, comm., alarm, etc) together at the access panel, then place all the loose wire inside the Outdoor Wall Mount. Close the access panel with the two philips screws provided.
5. Install the PTZ camera head to the Outdoor Housing (SC-OH) base, following the instructions from the EasyTrak™ PTZ dome manual. (2.2.0 Mounting the EasyTrak™ PTZ Dome Camera)

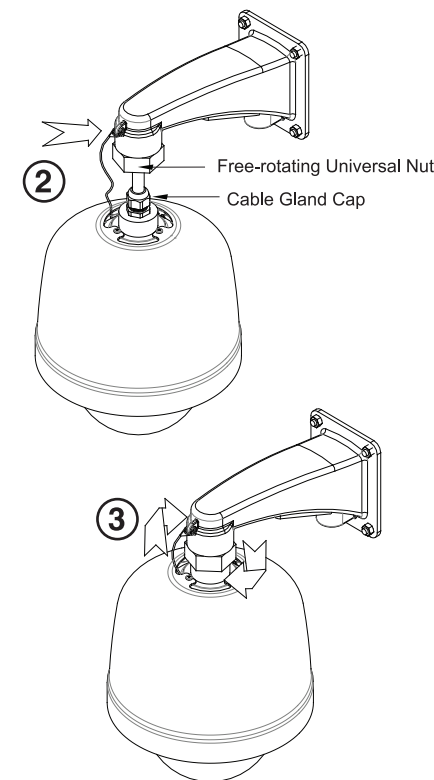

INSTALLING THE PEDESTAL MOUNT

1. First, take the cables from the Outdoor Housing (SC-OH) and feed it through the side with the free-rotating universal nut, and out through the other end.
2. (3) Once the cable gland cap reaches the top, and is flush inside the free-rotating universal nut, rotate the nut clockwise and join the Outdoor Wall Mount (SD-WL) and the Pedestal Mount (SD-PM) together.
3. Take the entire assembly and mount it to the desired location on the ceiling.
4. (5) Install the PTZ camera head to the Outdoor Housing following the instructions provided on the EasyTrak™ PTZ dome manual.

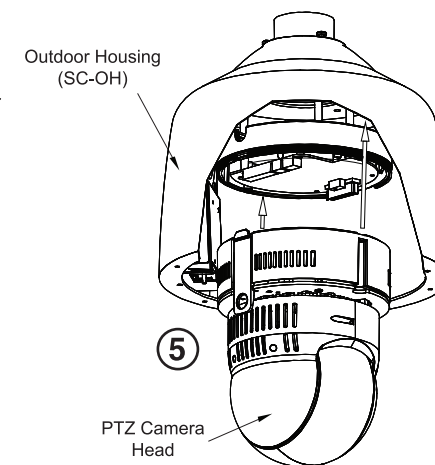

NUVICO®

Tel: 201-541-1605 Fax: 201-541-1620
Email: techsupport@nuvico.com
www.nuvico.com

Version 1.0
Printed In Korea