

5MP VF Bullet Camera

NC2-5M-B31

Specification



TECHNICAL SPECIFICATION:


5MP VF Bullet Camera	NC2-5M-B31
Resolution	5MP (2592 x 1920)
Image Sensor	1/3" CMOS
Day/Night Functionality	Yes w/ICR
Lens Type	3.3 ~ 10.5mm VF Lens
Angle of View	81°(W) ~ 23°(T)
IR LEDs	42
IR LEDs Distance	Up to 100ft.
Electronic Shutter	1/30 ~ 1/6000 Sec
Minimum Illumination	1.0 Lux (Color), 0.001 Lux (IR LEDs On)
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
General Information	NC2-5M-B31
Operating Temperature	0 °F ~ 122 °F
Operating Humidity	Within 80% RH
Input Voltage	12VDC Voltage

*Specifications are subject to change without any prior notice.

KEY FEATURES:

- ONVIF Supported
- 5MP Outdoor rated Vandal Dome w/LED (NC2-5M-B31)
- 3.3mm - 10.5mm Vari-focal Lens (NC2-5M-B31)
- 10fps @ 5MP, 20fps @ 3MP, 30fps @ 2MP
- External Lens Adjustments
- Alarm/ Audio
- Service Monitor Output - SD Analog (CVBS)
- Day/Night Functionality with ICR
- 42 IR LEDs (Up to 100ft.)
- Built-in Server for Webviewer
- Point and Shoot Installation
- H.264/MJPEG Compression Method
- Power Over Ethernet (IEEE 802.3af Compliant) & 12VDC Voltage

DIMENSIONS (INCH:MM):

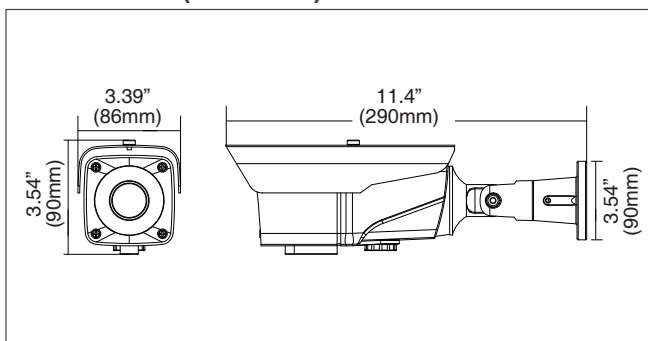

CONSTRUCTION:

- Outdoor / Metal Housing

APPLICABLE PRODUCTS:

- SN2-C Intersys Compact NVR
- SN2-P Intersys professional NVR
- SN2-U Intersys Ultra NVR
- SN2-L Intersys Limited NVR