

NCT-6M-FE
 6MP IP Outdoor Fisheye Camera

Highlights:

- 30FPS @ 2160 x 2160
- 1.07mm Fixed Lens
- H.265 / H.264 / MJPEG
- IR Range Up to 100'
- DWDR, DNR, Day/Night, Defog
- Outdoor IP67
- 12VDC, PoE
- Xcel CMS and Mobile App Platform Compatible

Specifications:

VIDEO	
Image Sensor	1/2.9" CMOS 6MP
Image Size	2160 x 2160
Lens	1.07mm
Electronic Shutter	1/25s ~ 1/100,000s
IR Distance	Up to 100 ft.
Frame Rate	30fps @ 2160 x 2160
Min. Illumination	0.068 lux @ F2.0, AGC On, 0 Lux with IR On
IMAGE	
Video Compression	H.265 / H.264 / MJPEG
Main Stream	60Hz: 30fps @ 2160 x 2160, 1920 x 1920, 1440 x 1440, 1920 x 1080, 960 x 540 50Hz: 30fps @ 2160 x 2160, 1920 x 1920, 1440 x 1440, 1920 x 1080, 960 x 540
Bit Rate	128 Kbps ~ 16 Mbps
Encode Mode	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Sharpen, Wide Dynamic, NR, etc. Adjustable Through Client Software or Web Browser
Audio Compression	G711A / U
FUNCTIONS	
Remote Monitoring	Web Browsing, CMS Remote Control
Online Connection	Simultaneous Monitoring for Up to 11 Users, Multi-stream Real Time Transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, UPnP, HTTP, HTTPS
Interface Protocol	ONVIF, Nuvico Xcel
Storage	Network Remote Storage, Micro SD Memory Slot



















Sensor 6 Megapixel PoE Smart IR BLC DWDR Day & Night Weatherproof

FUNCTIONS CONT.	
Smart Alarm	Motion Alarm, Sensor Alarm
Day/Night	ICR
WDR	Digital WDR
DNR	3D DNR
BLC	Yes
Defogging	Yes
HLC	Yes
GENERAL	
Connectors	RJ45, CVBS BNC, 12VDC Power Input
Power Requirement	12VDC / PoE
Power Consumption	< 12W
Protection	IP67
Working Environment	-22°F ~ 122°F
Relative Humidity	Less than 95% Non-condensing
Weight	.99 lbs
Dimensions	Φ 5.12" x 1.61"
Warranty	3 Years
Package Contents	Camera, Installation CD, Manual, Template, Installation Accessories

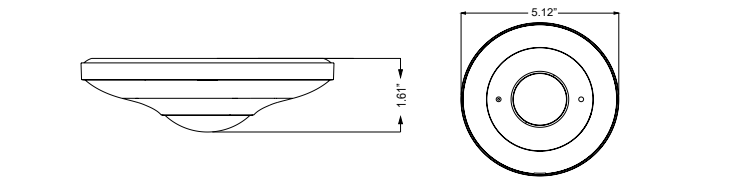

ACCESSORIES

NJB150 Junction Box
 