

PA-PRM200

PARAPET MOUNT & ROOF MOUNT



NUVICO

www.nuvico.com

Please thoroughly familiarize yourself with the information in this manual prior to installation and operation.

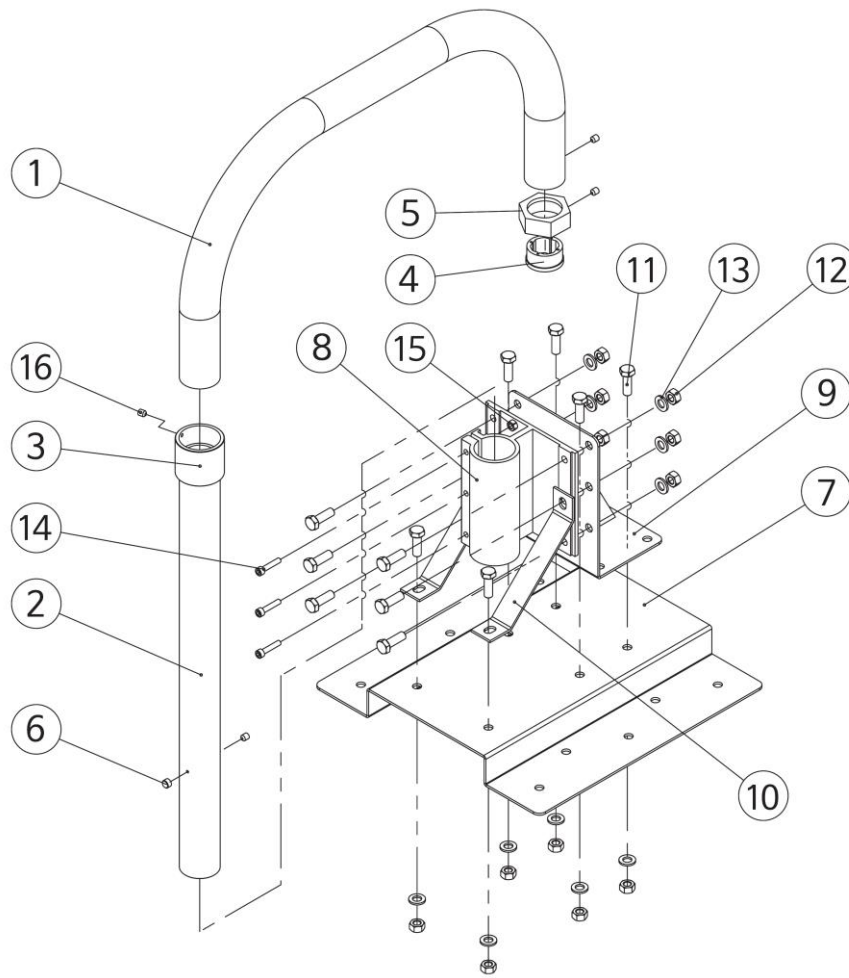


Figure 2. Exploded Assembly Diagram

MOUNTING KIT COMPONENTS


NO	QTY.	PART NAME	MATERIAL
1	1	Pipe40u-type	Al
2	1	Pipe40-len60-st	Al
3	1	Socket(1-12)	Steel
4	1	Locking_Socket	AL
5	1	Locking_Nut	AL
6	2	Pan head screw - M4 x 8	SUS
7	1	Base_plate	Steel
8	1	Pipe-fastener	Al
9	1	Bracket_angle	Steel
10	2	Support-angle	Steel
11	12	Hexagon head bolt M10 x 30	SUS
12	12	Hexagon nut M10	SUS
13	12	Spring washer M10	SUS
14	3	Wrench head bolt M6 x 30	SUS
15	3	Hexagon nut M6	SUS
16	3	Set screw M5 x 6	SUS
17	1	HEX LENCH 2.5mm	Steel
18	1	HEX LENCH 5mm	Steel
19	1	Tefron seal tape	SUS

Note: You should wind nipple with tefron tape for sealing before connecting outdoor housing.

4. SPECIFICATIONS

MECHANICAL	
Maximum Load	20pounds (9kg)
Construction :	Aluminum, Steel & Stainless hardware
Finish :	Light-gray polyester powder coat
Dimensions :	See Figure 3
Unit Weight :	Roof Mount: 10.2kg
Shipping Weight :	Roof Mount: 11.5kg
Shipping Dimension :	24.8x15.4x4.6 in (650x392x118)
Shipping Volume	1.0ft ³ (0.03m ³)

- Weight and dimension are approximate
- Specifications are subject to change without notice.

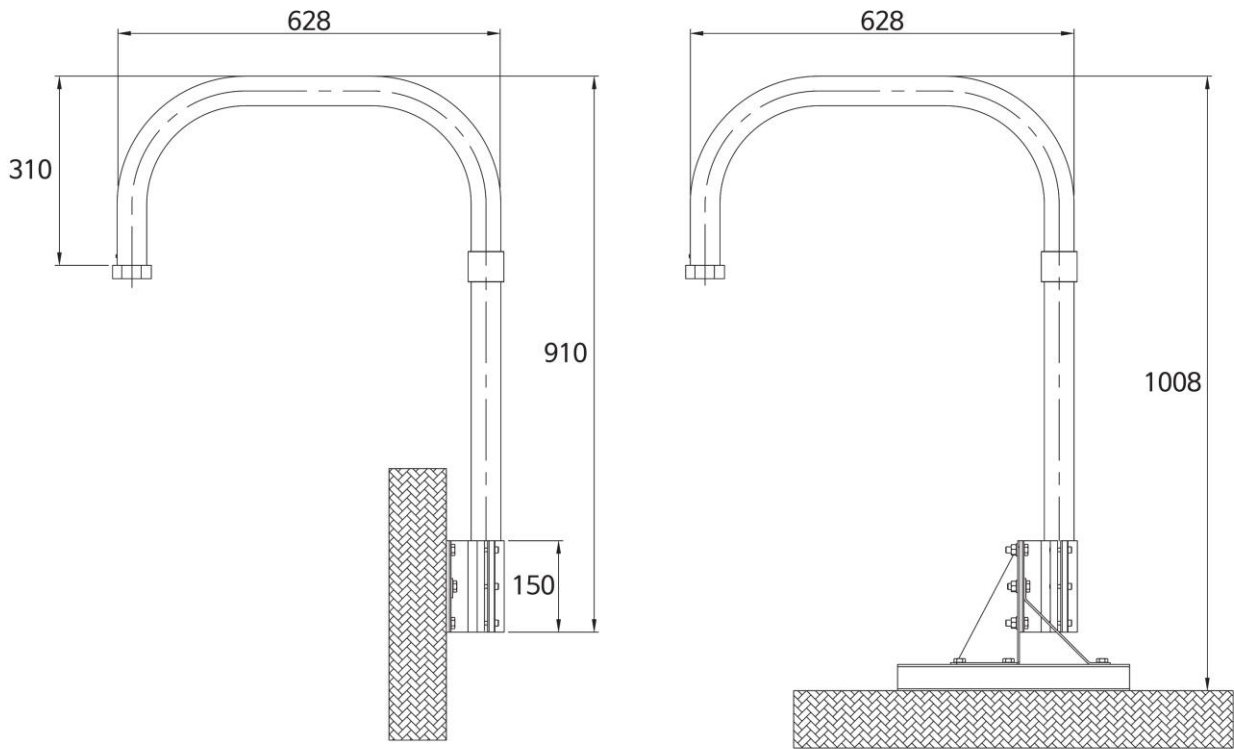

(Unit : mm)

Figure 3. Dimension Drawing