

Analog Bullet Camera

CB-HDE65N-L

Specification

Day/Night, 700 TV Lines, 4(Power LED), Weatherproof Bullet Camera



KEY FEATURES:

- 1/3" CCD Sensor
- 700 TV Lines(Color), 750 TV Lines(B/W)
- 6~50mm, DC Auto Iris Lens
- Day/Night Functionality with ICR
- 4(Power LED)
- Smart IR - Automatic Intensity Adjustment
- IR LED On/Off Function
- External Adjustments - Zoom and Focus
- 0.01 Lux (Color), 0.00 Lux (B/W, IR LEDs On)
- DNR: Digital Noise Reduction
- ATW: Automatic Tracking White Balance
- HLC: High Light Compensation
- ATR: Adaptive Tone Reproduction
- Service Monitor Output
- 12VDC/24VAC Dual Voltage

CONSTRUCTION:

- 3-Axis Aluminum Bracket (Wire Feed-through)
- Weatherproof Aluminum Housing

TECHNICAL SPECIFICATION:


Technical Specification	CB-HDE65N-L
Video Format	NTSC
Image Sensor	1/3" CCD
Horizontal Resolution	700 TV Lines, 750 TV Lines(B/W)
Day/Night Functionality	Yes w/ICR
Lens Type (DC Auto Iris)	6 ~ 50mm Vari-focal Lens
IR LEDs	4 (Power LED)
IR LEDs Distance	Up to 150ft.
LEDs Illumination Angle	44°(W) ~ 6.6°(T)
Sync System	Internal
Effective Pixels (HxV)	976(H) x 494(V)
Scanning System	525 Lines. 2:1 Interlaced
Electronic Shutter	1/60 ~ 1/100,000 sec.
Main Video Output	1.0 Vp-p Composite, 75 ohm
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
Minimum Illumination	0.01 Lux (Color), 0.00 Lux (IR LEDs on)
S/N Ratio	More than 48dB (AGC Off)
Camera Control	External Adjustments - Zoom and Focus
General Information	CB-HDE65N-L
Operating Temperature	23°F ~ 113°F (-5°C ~ +45°C)
Operating Humidity	Within 90% RH
Power Consumption	24AC / 1.5 Amp (LEDs On)
Input Voltage	12VDC/24VAC Dual Voltage

*Specifications are subject to change without any prior notice.

DIMENSIONS (INCH:MM):



ACCESSORIES:

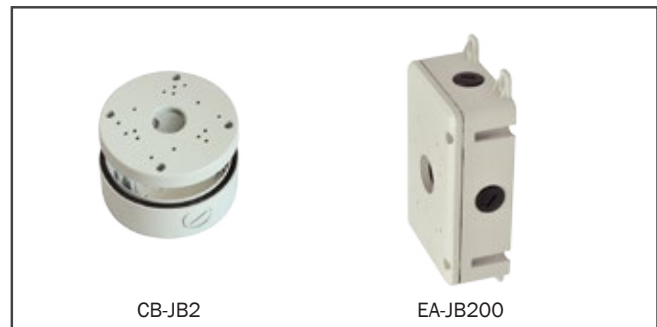

CB-JB2

EA-JB200