


PA-CPMB200

POLE & CORNER MOUNT BRACKET

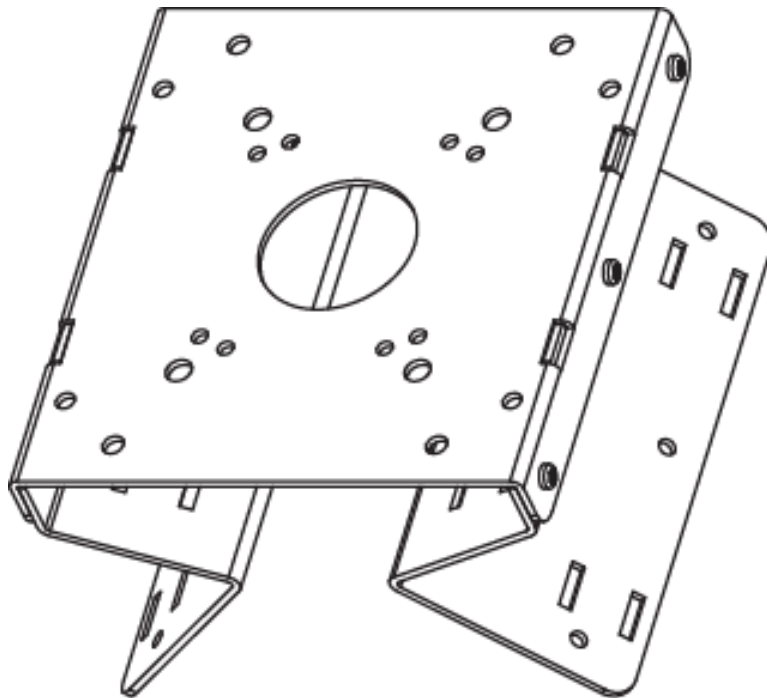

NUVICO

www.nuvico.com


Before installing and using this product, please read the instructions fully and carefully. Be sure to keep it handy for late use.

Prior to Use

- Avoid installing the mount onto an unstable structure such as a gypsum drywall panel.
- Install the mount onto a strong structure such as a concrete wall, steel beam, etc.
- Use concrete screws with plugs or other installation tools when installing the mount onto a concrete structure, make sure that all the screw parts are metallic. Avoid screwing too close to the edge of a piece of wood when screwing into a wooden structure.

Composition


- Confirm that the following parts are included.



Pole & Corner Mount



Instruction Manual



Stainless Hose Band (2pcs)



6pcs
Plastic Anchor (D6)



6pcs
Screw Tapping
BH 6x50L Stainless



4pcs
Screw Machine (SEMS)
PH M6x25L Stainless




4pcs
Screw Machine (SEMS)
PH M8x35L Stainless




4pcs
Nut
M8 Stainless

Feed the hose bands through the vertical slots located on the four corners of the mounting flaps as shown below. Wrap the hose bands around the pole structure then use the driver to rotate the screw that is attached at the end of the hose bands clockwise. Rotating the screw shortens the bands thereby fastening them around the structure. Using the pole and Mount as a template,

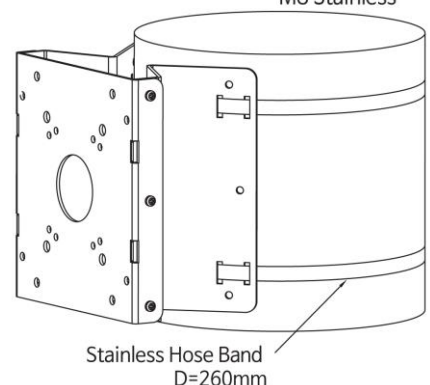


Using the pole & mount as a template, mark the locations of the six screw holes where the mounting adaptor will go. Install the plastic anchors(D6) at the six pre-marked locations. Use the screws with washers to affix the mount adaptor to the corner of a building structure.

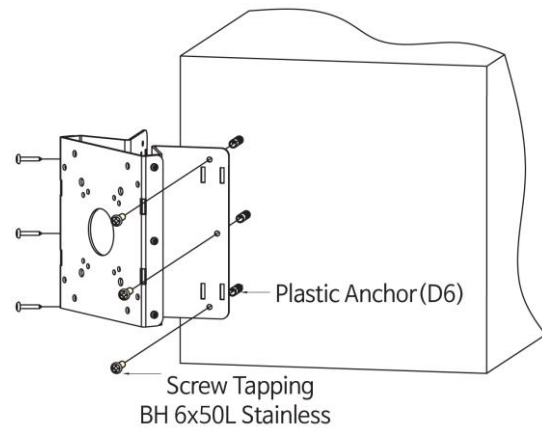


- Mounting to the poles or the corners of building structure.


Using the appropriate screws and nuts supplied, affix the power box base to the pole and corner mount at the four corners of the mounting surface.

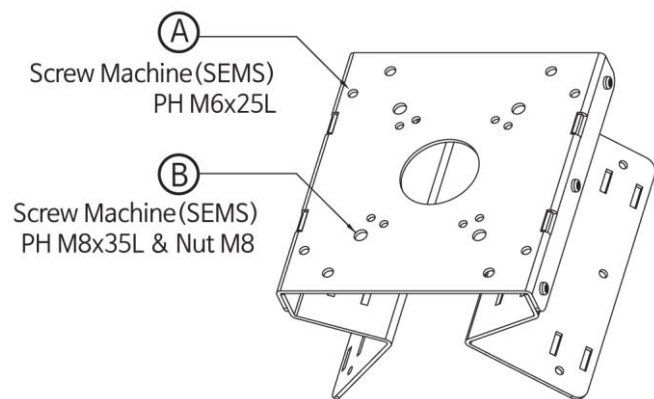


Using the appropriate screws and nuts supplied, affix the power box base to the pole and corner mount at the four corners of the mounting surface.

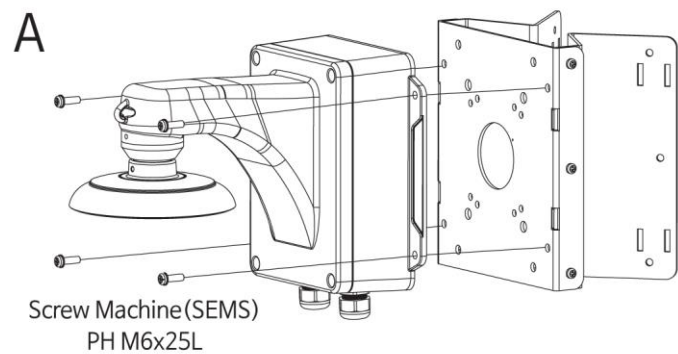

Using the appropriate screws and nuts supplied, affix the wall mount to the pole and corner mount at the four corners of the mounting surface as shown the below.

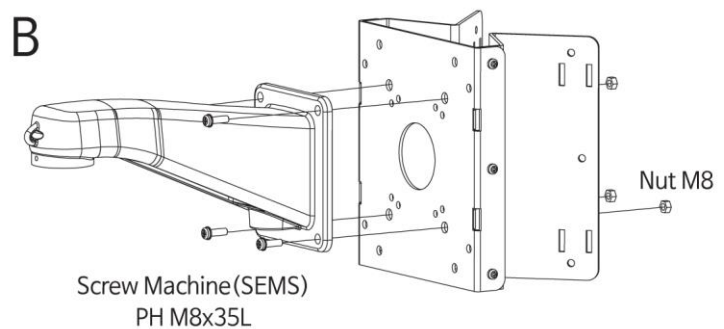

DIMENSIONS

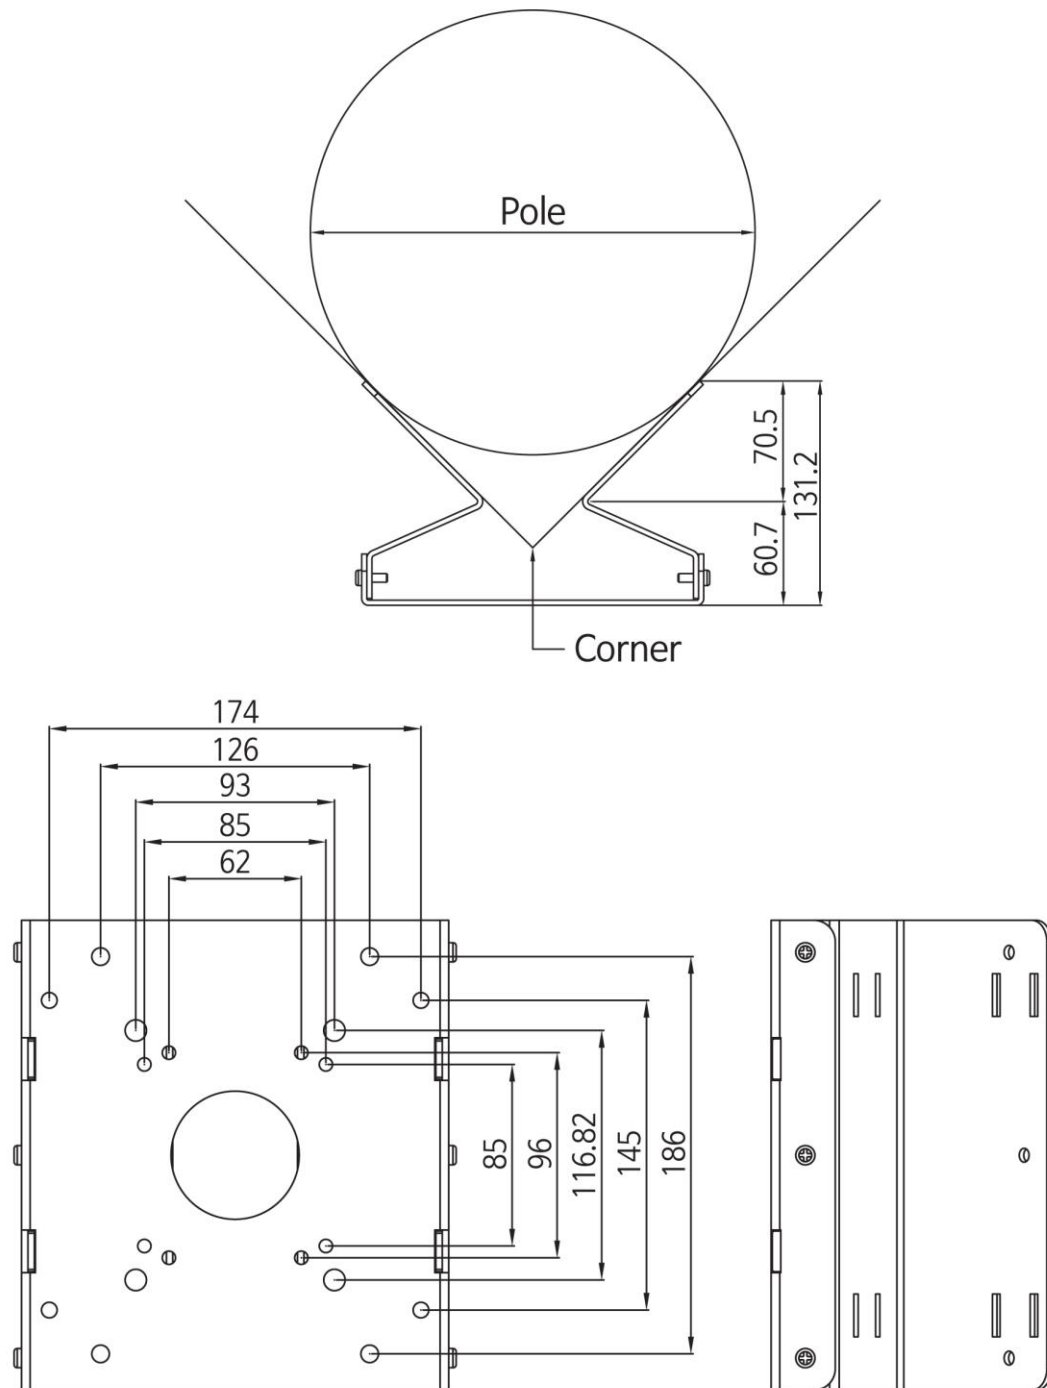

Tel: 201-541-1605
E-mail: Techsupport@nuvico.com