

VGA/Mouse Extender Kit

VM-E100



VM-E100-M




VM-E100-D

KEY FEATURES


- Extends the monitor and mouse control up to:
UTP: Up to 100 ft.
FTP: Up to 300 ft.
- Supports up to 1920x1080 resolution
- Single Cat5 cable for both video and mouse control
- Phase and Gain Dials (VM-E100-M)
- Mini USB to USB Cable included
- Power adapter included

SYSTEM CONFIGURATION

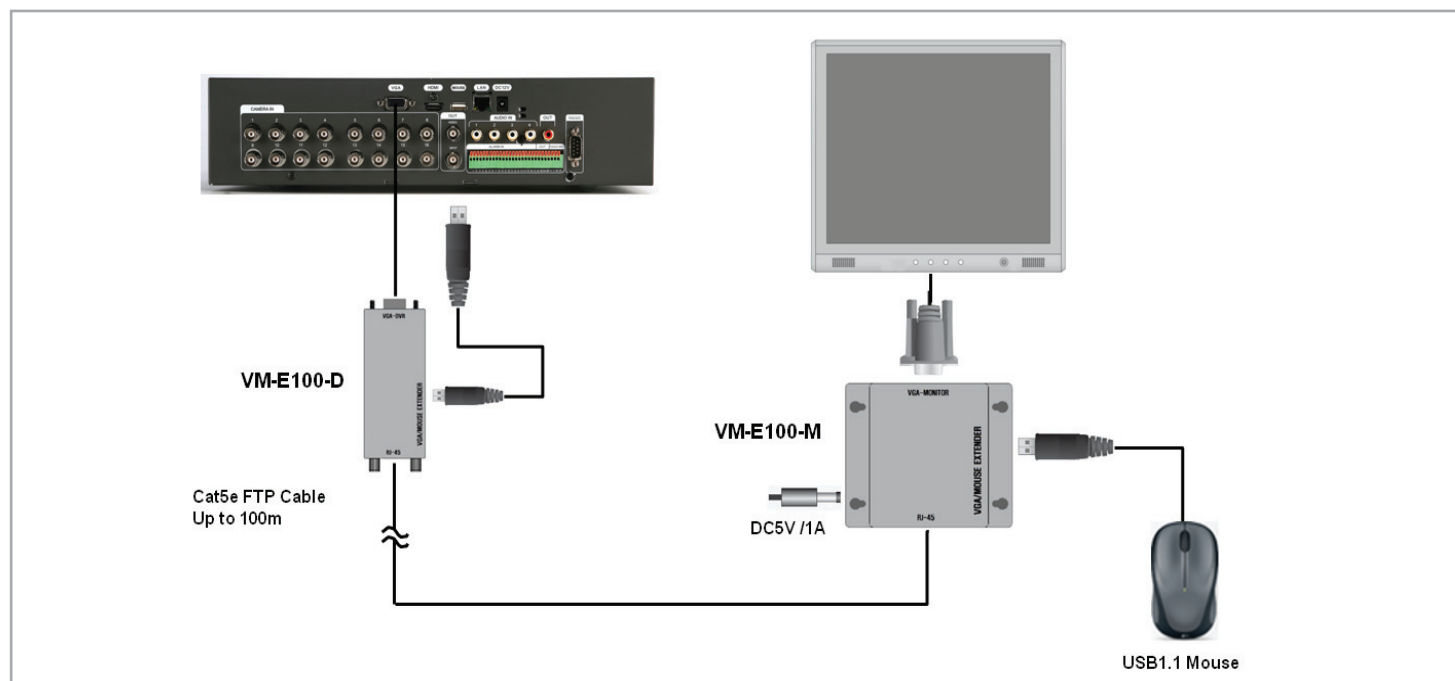

DIMENSIONS

Unit: Inches (mm)

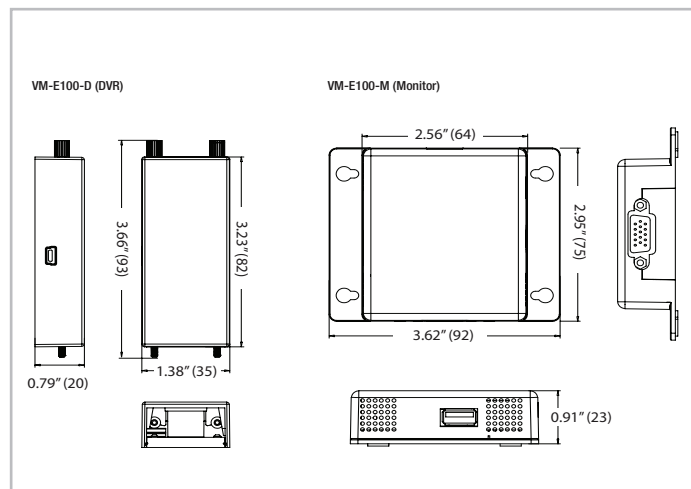

TECHNICAL SPECIFICATIONS

Specifications	VM-E100-D	VM-E100-M
VGA	15-pin D-sub male	15-pin D-sub female
RJ-45	RJ-45 female	RJ-45 female
USB	Mini USB 5P female	USB A female
Power	Mini USB	DC Jack 2.5mm
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)	32°F ~ 122°F (0°C ~ 50°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)	-4°F ~ 140°F (-20°C ~ 60°C)
Housing	ABS Plastic	ABS Plastic
Dimensions (W x D x H)	1.38" x 0.76" x 3.64"	3.62" x 0.91" x 2.95"
	35mm x 19.7mm x 92.5mm	91.9mm x 23mm x 75mm
Weight	0.09 lb (41g)	0.15 lb (68g)
Power Consumption	5VDC, 2.5W	5VDC, 2.5W

*Specifications are subject to change without any prior notice.

Cable Requirements		Transmission Range
Cat5e (Category 5)	UTP Cable	Up to 100 ft. (30m)
	FTP Cable	Up to 300 ft. (100m)

* For best result, use Belden 7912A or equivalent FTP cables with RJ-45 Shielded Modular Plugs.