



# **NCT-5ML Xcel Series IP Cameras**

**USER MANUAL**

- This product is intended to be supplied by a Listed Power Unit, marked with 'Limited Power Source', 'LPS' on unit, output rated minimum 12V/2 A or POE 48V/350mA(depending on models), no more than 2000m altitude of operation and Tma=60 Deg.C.
- As for the modes with PoE function, the function of the ITE being investigated to IEC 60950-1 standard is considered not likely to require connection to an Ethernet network with outside plant routing, including campus environment and the ITE is to be connected only to PoE networks without routing to the outside plant.
- Do not attempt to disassemble the camera; in order to prevent electric shock, do not remove screws or covers.
- There are no user-serviceable parts inside. Please contact the nearest service center as soon as possible if there is any failure.
- Avoid from incorrect operation, shock vibration, heavy pressing which can cause damage to product.
- Do not use corrosive detergent to clean main body of the camera. If necessary, please use soft dry cloth to wipe dirt; for hard contamination, use neutral detergent. Any cleanser for high grade furniture is applicable.
- Avoid aiming the camera directly towards extremely bright objects, such as, sun, as this may damage the image sensor.
- Please follow the instructions to install the camera. Do not reverse the camera, or the reversing image will be received.
- Do not operate it in case temperature, humidity and power supply are beyond the limited stipulations.
- Keep away from heat sources such as radiators, heat registers, stove, etc.
- Do not expose the product to the direct airflow from an air conditioner.
- This manual is for using and managing the product. We may reserve the rights of amending the typographical errors, inconsistencies with the latest version, software upgrades and product improvements, interpretation and modification. These changes will be published in the latest version without special notification.
- All pictures, charts, images in this manual are only for description and explanation of our products. The ownerships of trademarks, logos and other intellectual properties related to Microsoft, Apple and Google belong to the above-mentioned companies.
- This manual is suitable for IR water-proof network cameras.

# Disclaimer & Regulatory Information

## Disclaimer

■ With regard to the product with internet access, the use of the product shall be wholly at your own risks. Our company shall not be responsible for abnormal operation, privacy leakage or other damages resulting from cyber attack, hacker attack, virus inspection, or other internet security risks; however, Our company will provide timely technical support if necessary.

■ Surveillance laws vary from country to country. Check all laws in your local region before using this product for surveillance purposes. We shall not take the responsibility for any consequences resulting from illegal operations.

## FCC Marking

**FC** The products have been tested and found in compliance with the council FCC rules and regulations part 15 subpart B. Operation of this product is subject the following two conditions: (1) this device may not cause harmful interface, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## CE Marking

**CE** The products have been manufactured to comply with the following directives.  
EMC Directive 2014/30/EU

## RoHS Marking

The products have designed and manufactured in accordance with Directive EU RoHS Directive 2011/65/EU and its amendment Directive EU 2015/863 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

# Table of Contents

<b>1</b>	<b>Introduction .....</b>	<b>1</b>
<b>2</b>	<b>Network Configuration .....</b>	<b>2</b>
2.1	LAN.....	2
2.1.1	Access through Xcel IP Utility .....	2
2.1.2	Directly Access through Web Browser .....	4
2.2	WAN.....	5
<b>3</b>	<b>Live View .....</b>	<b>8</b>
<b>4</b>	<b>Network Camera Configuration.....</b>	<b>10</b>
4.1	System Configuration .....	10
4.1.1	Basic Information .....	10
4.1.2	Date and Time .....	10
4.1.3	Local Config.....	11
4.2	Image Configuration.....	11
4.2.1	Display Configuration .....	11
4.2.2	Video Configuration .....	13
4.2.3	OSD Configuration.....	15
4.2.4	Video Mask .....	15
4.2.5	ROI Configuration.....	16
4.2.6	Lens Control .....	17
4.3	Alarm Configuration.....	17
4.3.1	Motion Detection.....	17
4.3.2	Alarm Server .....	19
4.4	Event Configuration.....	20
4.4.1	Object Removal .....	20
4.4.2	Exception.....	21
4.4.3	Line Crossing.....	22
4.4.4	Intrusion.....	24
4.5	Network Configuration .....	25
4.5.1	TCP/IP .....	25
4.5.2	Port .....	27
4.5.3	Server Configuration .....	27
4.5.4	DDNS .....	27
4.5.5	802.1x.....	29
4.5.6	RTSP.....	30
4.5.7	UPNP.....	31
4.5.8	Email .....	31
4.5.9	FTP.....	32
4.5.10	HTTPS.....	32
4.5.11	P2P (Optional).....	34
4.5.12	QoS.....	34

4.6	Security Configuration.....	34
4.6.1	User Configuration .....	34
4.6.2	Online User.....	36
4.6.3	Block and Allow Lists .....	36
4.6.4	Security Management .....	36
4.7	Maintenance Configuration.....	37
4.7.1	Backup and Restore .....	37
4.7.2	Reboot .....	38
4.7.3	Upgrade .....	38
4.7.4	Operation Log.....	38
<b>5</b>	<b>Search .....</b>	<b>39</b>
5.1	Image Search .....	39
5.2	Video Search.....	40
<b>Appendix.....</b>		<b>42</b>
<b>Appendix 1 Q &amp; A.....</b>		<b>42</b>
<b>Appendix 2 Specifications .....</b>		<b>44</b>

# 1 Introduction


This IP Camera is designed for high performance CCTV solutions. It adopts state of the art video processing chips, integrated with the most advanced technologies (like video encoding and decoding technology) to make the image transmission more stable and smooth. Moreover, the built-in WEB server of this series improves the performance of the traditional surveillance system so that users can be easy to operate and monitor.

This product is widely used in banks, telecommunication systems, electricity power departments, law systems, factories, storehouses, uptowns, etc. In addition, it is also an ideal choice for surveillance sites with middle or high risks.

## Main Features

- 5MP (2592 x 1944) @ 20fps
- ICR auto switch, true day/night
- 3D DNR, digital WDR, defog, BLC, HLC, anti-flicker
- ROI coding
- Scene change detection, region intrusion detection, line crossing detection
- Supports the Nuvico Xcel Mobile app on iOS and Android smart phones and devices

## Surveillance Application

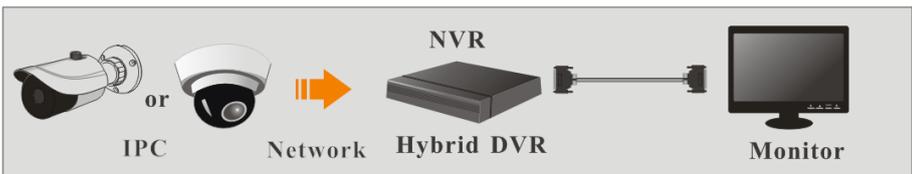

## 2 Network Configuration


You may connect the IP camera via LAN or WAN. The details are as follows:

### 2.1 LAN


In LAN, there are two ways to access IP Camera: 1. Access through Xcel IP Utility; 2. Direct Access through Web Browser.

#### 2.1.1 Access through Xcel IP Utility

Network connection:

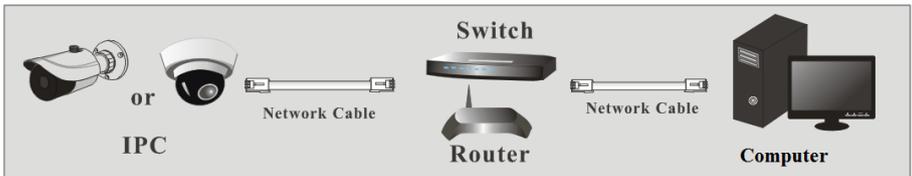

- ① Make sure the PC and IP camera are connected to the local network and the Xcel IP Utility is installed in the PC from the CD.
- ② Double click the Xcel IP Utility icon on the desktop to run this software as shown below:

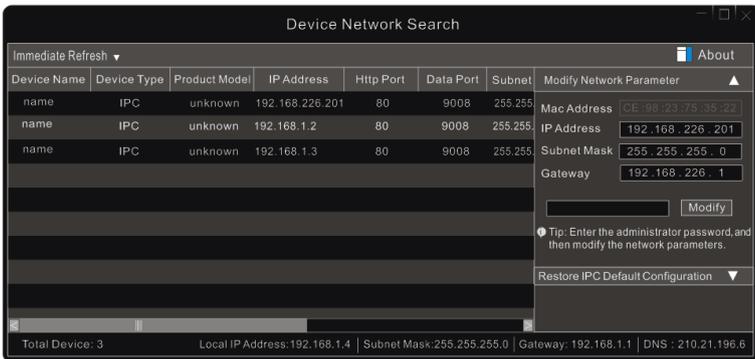

- ③ Modify the IP address. The default IP address of this camera is 192.168.226.201. Click the information of the camera listed in the above table to show the network information on the right hand. Modify the IP address and gateway of the camera and make sure the network address is in the same local network segment as the computer. Please modify the IP address of your device according to the practical situation.

Modify Network Parameter ▲

Mac Address CE:98:23:75:35:22

IP Address 192.168.1.201

Subnet Mask 255.255.255.0

Gateway 192.168.1.1

••••• Modify

For example, the IP address of your computer is 192.168.1.4. So the IP address of the camera shall be changed to 192.168.1.X. After modification, please enter the password of the administrator and click the “Modify” button to modify the setting.

☞ The default password of the administrator is “**123456**”.

④ Double click the IP address and then the system will pop up the web browser to connect the IP Camera. Follow directions to download, install and run the Active X control.

NUVICO Xcel IP CAMERA CONFIGURATION

Name: admin

Password: \*\*\*\*\*

Stream Type: 2560x1440 30fps

Language: English

Remember me

Login

Enter the username and password in the login window to log in.

☞ The default username is “**admin**”; the default password is “**123456**”.

Please change the default password ×

Modify Password

New Password

Confirm Password

Do not show again

OK Cancel

The system will pop up the above-mentioned textbox to ask you to change the default password. It is strongly recommended to change the default password for account security. If “Do not show again” is checked, the textbox will not appear next time.

### 2.1.2 Direct Access through Web Browser

The default network settings are as shown below:

IP address: **192.168.226.201**


Subnet Mask: **255.255.255.0**

Gateway: **192.168.226.1**


HTTP: **80**

Data port: **9008**

You may use the above default settings when you log in the camera for the first time. You may directly connect the camera to the computer through network cable.

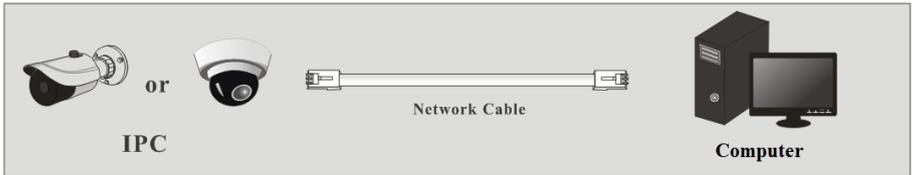


① Manually set the IP address of the PC and the network segment should be as the same as the default settings of the IP camera. Open the network and share center. Click “Local Area Connection” to pop up the following window.

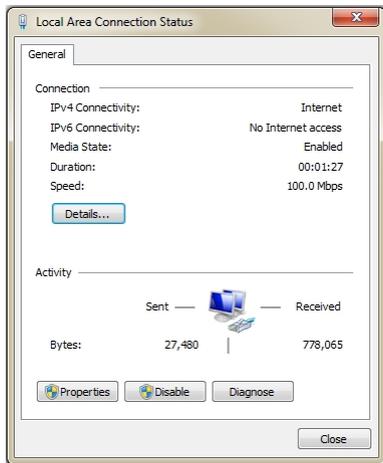

Select “Properties” and then select internet protocol according to the actual situation (for


example: IPv4). Next, click the “Properties” button to set the network of the PC.

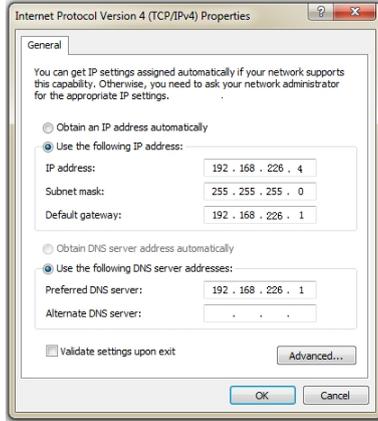

- ② Open the web browser and enter the default address of IP camera and confirm.
- ③ Follow directions to download and install the Active X control.
- ④ Enter the default username and password in the login window and then enter to view.

## 2.2 WAN

### ➤ Access through the router or virtual server

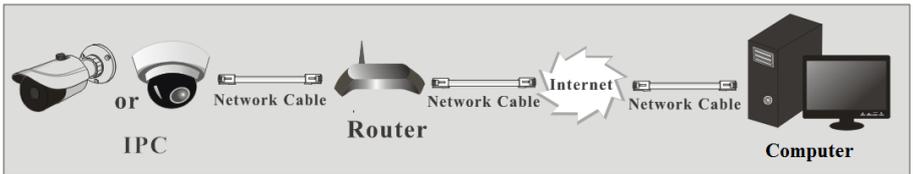

- ① Make sure the camera is well connected via LAN and then log in the camera via LAN and go to Config→Network→Port menu to set the port number.

HTTP Port	80
HTTPS Port	443
Data Port	9008
RTSP Port	554

### Port Setup

- ② Go to Config →Network→TCP/IP menu to modify the IP address.

IPv4	IPv6	PPPoE Config	IP Change Notification Config
<input type="radio"/> Obtain an IP address automatically			
<input checked="" type="radio"/> Use the following IP address			
IP Address	192.168.226.201	Test	
Subnet Mask	255.255.255.0		
Gateway	192.168.226.1		
Preferred DNS Server	210.21.196.6		
Alternate DNS Server	8.8.8.8		

**IP Setup**

③ Go to the router’s management interface through the web browser to forward the IP address and port of the camera in the “Virtual Server”.


Port Range					
Application	Start	End	Protocol	IP Address	Enable
1	9007	to 9008	Both	192.168.1.201	<input checked="" type="checkbox"/>
2	80	to 81	Both	192.168.1.201	<input checked="" type="checkbox"/>
3	10000	to 10001	Both	192.168.1.166	<input type="checkbox"/>
4	21000	to 21001	Both	192.168.1.166	<input type="checkbox"/>

**Router Setup**

④ Open the web browser and enter its WAN IP and http port to access.

➤ **Access through PPPoE dial-up**

Network connection

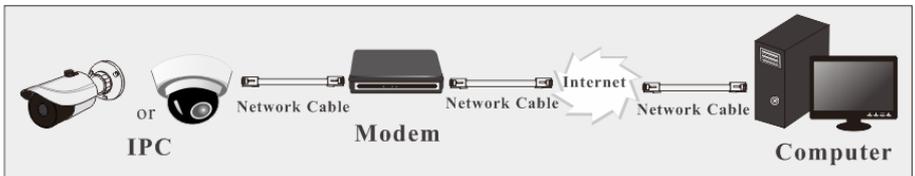

Access the camera through PPPoE auto dial-up. The setting steps are as follow:

- ① Go to Config→Network→Port menu to set the port number.
- ② Go to Config →Network→TCP/IP→PPPoE Config menu. Enable PPPoE and then enter the

user name and password from your internet service provider.


IPv4	IPv6	<b>PPPoE Config</b>	IP Change Notification Config
<input checked="" type="checkbox"/> Enable			
User Name	<input type="text" value="xxxxxxx"/>		
Password	<input type="password" value="•••••"/>		
<input type="button" value="Save"/>			

③ Go to Config → Network → DDNS menu. Before configuring the DDNS, please apply for a domain name first. Please refer to DDNS configuration for detail information.

④ Open the web browser and enter the domain name and http port to access.

➤ **Access through static IP**

Network connection

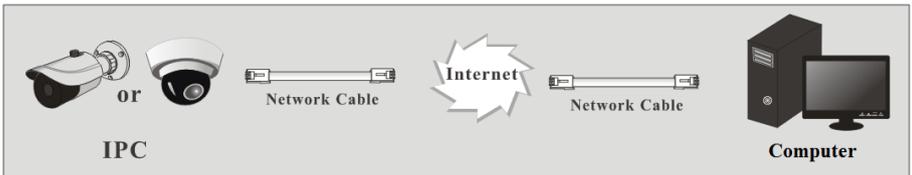

The setting steps are as follow:


① Go to Config → Network → Port menu to set the port number.

② Go to Config → Network → TCP/IP menu to set the IP address. Check “Use the following IP address” and then enter the static IP address and other parameters.

③ Open the web browser and enter its WAN IP and http port to access.

## 3 Live View

After you log in, you will see the following window.

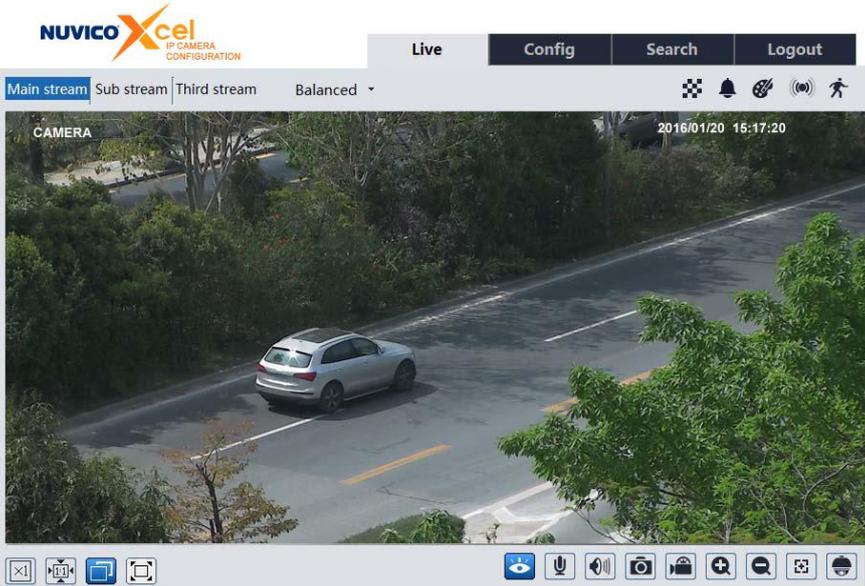

The following table is the instructions of the icons on the live view interface.

Icon	Description	Icon	Description
	Original size		Zoom out
	Fit correct scale		Abnormal clarity indicator
	Auto (fill the window)		Scene change indicator
	Full screen		Line crossing indicator
	Start/stop live view		Object removal indicator
	Enable/disable audio (only available for some models)		Intrusion indicator
	Snapshot		Motion alarm indicator
	Start/stop local recording		AZ control (only available for the model with motorized zoom lens )
	Zoom in		

- The smart alarm indicators will flash only if the camera supports these functions and the corresponding events are enabled.
- In full screen mode, double click on the mouse to exit or press the ESC key on the keyboard.
- Click AZ control button to show AZ control panel. The descriptions of the control panel are as follows:

Icon	Description	Icon	Description
	Zoom -		Zoom +
	Focus -		Focus +
	One key focus (used when image is out of focus after manual adjustment)		

# 4 Network Camera Configuration

In the Xcel IP Camera Configuration client, choose “Config” to go to the configuration interface.  
**Note:** Wherever applicable, click the “Save” button to save the settings.

## 4.1 System Configuration

### 4.1.1 Basic Information

In the “Basic Information” interface, the system information of the device is listed.

Device Name	Nuvico Xcel
Product Model	NCT-5ML-B2
Brand	Nuvico Xcel
Software Version	4.2.1.0(22767)
Software Build Date	2019-05-09
Kernel Version	01050404
Hardware Version	1.3-1515402
Onvif Version	18.06
OCX Version	2.04.6
MAC	5C:69:84:00:05:2E

Some versions may support device ID and QR code. Having been enabled P2P (see Network Configuration-[P2P](#)), the network camera can be quickly added to mobile surveillance client, by scanning the QR code or entering device ID.

### 4.1.2 Date and Time

Go to Config→System→Date and Time. Please refer to the following interface.

Zone Date and Time

Zone GMT (Dublin, Lisbon, London, Reykjavik)

DST

Auto DST

Manual DST


Start Time January First Sunday 00 Hour

End Time February First Monday 00 Hour

Time Offset 120 Minutes


Save

Select the time zone and DST as desired.  
Click the “Date and Time” tab to set the time mode.

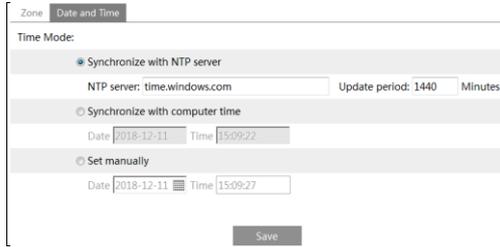

### 4.1.3 Local Config

Go to Config→System→ Local Config to set up the storage path of captured pictures and recorded videos on the local PC. There is also an option to enable or disable the bitrate display in the recorded files.




For models with a built-in Mic, there is also an option to enable or disable audio recording.

## 4.2 Image Configuration

Image Configuration includes Display, Video/Audio, OSD, Video Mask and ROI Config.

### 4.2.1 Display Configuration

Go to Image→Display interface as shown below. The image brightness, contrast, hue and saturation and so on for common, day and night mode can be set up separately. The image effect can be quickly seen by switching the configuration file.

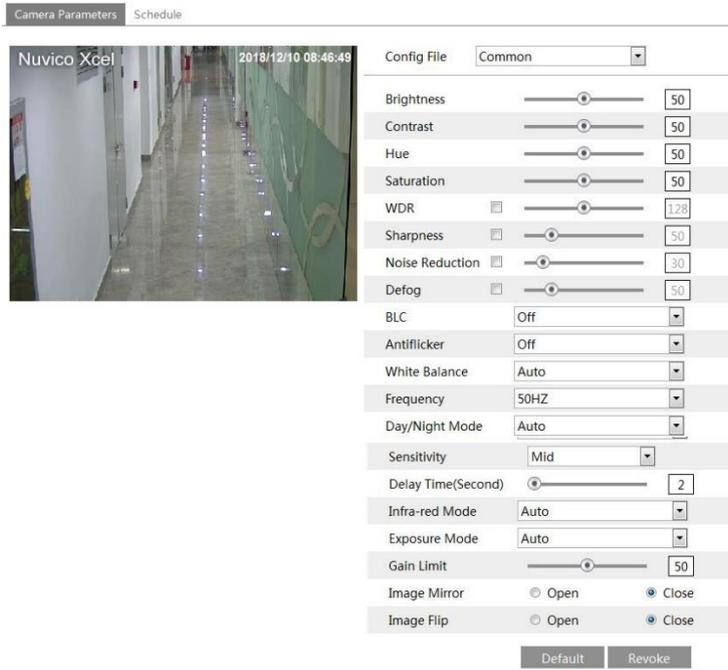

**Brightness:** Set the brightness level of the camera image.

**Contrast:** Set the color difference between the brightest and darkest parts.

**Hue:** Set the total color degree of the image.

**Saturation:** Set the degree of color purity. The purer the color is, the brighter the image is.

**WDR:** WDR can adjust the camera to provide a better image when there are both very bright and very dark areas simultaneously in the field of the view by lowering the brightness of the bright area and increasing the brightness of the dark area. Recording will be stopped for a few seconds while the mode is changing from non-WDR to WDR mode.

**Sharpness:** Set the resolution level of the image plane and the sharpness level of the image edge.

**Noise Reduction:** Decrease the noise and make the image more thorough. Increasing the value will make the noise reduction effect better but it will reduce the image resolution.

**Defog:** Activating this function and setting an appropriate value as needed in foggy, dusty, smoggy or rainy environment to get clear images.

**Backlight Compensation:**

- Off: disables the backlight compensation function. It is the default mode.
- HLC: lowers the brightness of the entire image by suppressing the brightness of the image's bright area and reducing the size of the halo area.
- BLC: If enabled, the auto exposure will activate according to the scene so that the object of the image in the darkest area will be seen clearly.

**Antiflicker:**

- Off: disables the anti-flicker function. This is used mostly in outdoor installations.
- 50Hz: reduces flicker in 50Hz lighting conditions.

- 60Hz: reduces flicker in 60Hz lighting conditions.

**White Balance:** Adjust the color temperature according to the environment automatically.

**Frequency:** 50Hz and 60Hz can be optional.

**Day/night Mode:** Please choose the mode as needed.

**Sensitivity:** High, middle and low can be selected for switching back and forth from day to night modes.

**Infrared Mode:** Choose “ON”, “OFF” and “Auto” (**Some models may not support the infrared mode**).


**Exposure Mode:** Choose “Auto” or “Manual”. If manual is chosen, the digital shutter speed can be adjusted.

**Image Mirror:** Turn the current video image horizontally.


**Image Flip:** Turn the current video image vertically.

Schedule Settings of Image Parameters:

Click the “Schedule” tab as shown below.

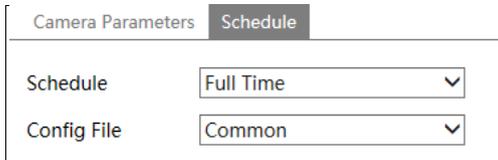

Set full time schedule for common, day, night mode and specified time schedule for day and night. Choose “Timing” in the drop-down box of schedule as shown below.

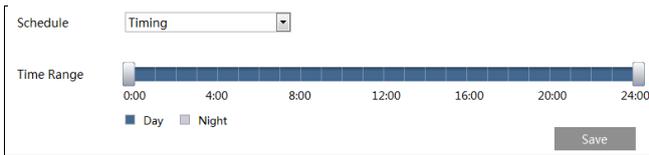

Drag “” icons to set the time of day and night. Blue means day time and white means night time. If the current mode of camera parameters is set to schedule, the image configuration mode will automatically switch between day and night according to the schedule.

## 4.2.2 Video Configuration

Go to Image→Video interface as shown below. In this interface, set the resolution, frame rate, bitrate type, video quality and so on subject to the actual network condition.

Index	Stream	Resolution	Frame	Bitrate	Bitrate(Kbps)	Video	I Frame	Video	Profile
1	Main stre...	3840x2160	20	CBR	5120	High	80	H264	High Profile
2	Sub strea...	704x576	20	CBR	480	High	80	H264	High Profile
3	Third stre...	704x576	20	CBR	480	High	80	H264	High Profile

Send Snapshot 2 Size: (704x576)

Video encode slice split

Watermark ( H264, H265 ) Watermark content:

Three video streams can be adjustable.

**Resolution:** The size of image.

**Frame rate:** The higher the frame rate, the video is smoother.

**Bitrate type:** CBR and VBR are optional. Bitrate is related to image quality. CBR means that no matter how much change is seen in the video scene, the compression bitrate will be kept constant. VBR means that the compression bitrate will be adjusted according to scene changes. For example, for scenes that do not have much movement, the bitrate will be kept at a lower value. This can help optimize the network bandwidth usage.

**Bitrate:** it can be adjusted when the mode is set to CBR. The higher the bitrate, the better the image quality will be.

**Video Quality:** It can be adjusted when the mode is set to VBR. The higher the image quality, the more bitrate will be required.

**I Frame interval:** It determines how many frames are allowed between a “group of pictures”. When a new scene begins in a video, until that scene ends, the entire group of frames (or pictures) can be considered as a group of pictures. If there is not much movement in the scene, setting the value higher than the frame rate is fine, potentially resulting in less bandwidth usage. However, if the value is set too high, and there is a high frequency of movement in the video, there is a risk of frame skipping.

**Video Compression:** H264 and H265 are optional. If H.265 is chosen, make sure the client system is able to decode H.265.

**Profile:** Baseline, main/high profiles are optional. Baseline profile is mainly used in interactive application with low complexity and delay. Main/high profile is mainly used for higher coding requirement.

**Send Snapshot:** How many snapshots to generate for an event.

**Video encode slice split:** If enabled, you may get more fluency image even though using the low-performance PC.

**Watermark:** If enabled, input the watermark content. You may check the watermark when playing back the local record in the search interface, lest the record files is tampered.

Click the “Audio” tab to go to the interface as shown below.

Video Audio

Audio Encoding: G711A Audio Type: MIC

Save

**Audio Encoding:** G711A and G711U are selectable.

**Audio Type:** MIC.

### 4.2.3 OSD Configuration


Go to Image→OSD interface as shown below.



Time stamp, device name and OSD can be set up here. After enabling the corresponding display and entering the content, drag them to change their position. Then press the “Save” button to save the settings.

### 4.2.4 Video Mask

Go to Image→Video Mask interface as shown below. A maximum of 4 zones can be set up.

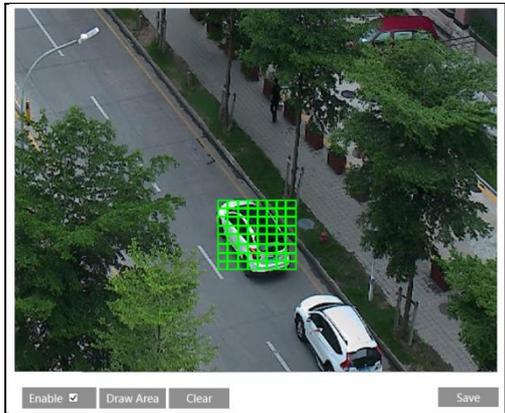

To set up video mask:

1. Enable video mask.
2. Click the “Draw Area” button and then drag the mouse to draw the video mask area.
3. Click the “Save” button to save the settings.
4. Return to the live to verify that the area have been drawn as shown as blocked out in the image.




To clear the video mask:

Go to video mask interface and then click “Clear” button to delete the current video mask area.

### 4.2.5 ROI Configuration

Go to Image→ROI Config interface as shown below. An area in the image can be set as a region of interest. This area will then have a higher bitrate than the rest of the image, resulting in better image quality for the identified area.

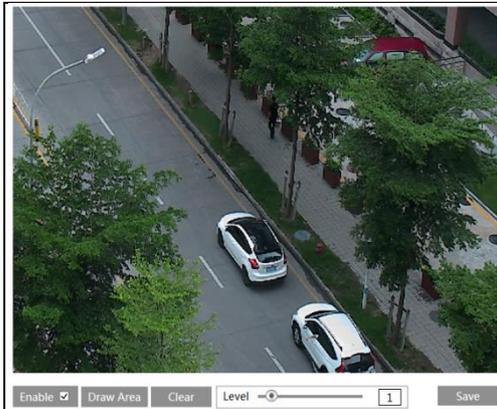


1. Check “Enable” and then click the “Draw Area” button.
2. Drag the mouse to set the ROI area. Up to 3 ROI areas can be set.
3. Set the level.
4. Click the “Save” button to save the settings.



### 4.2.6 Lens Control

This function is only available for the model with motorized zoom lens. Go to Config→Image→Zoom/Focus interface. Within this section, zoom and focus can be controlled. If the image is out of focus after a manual adjustment, one key focus can be used to set the focus automatically.

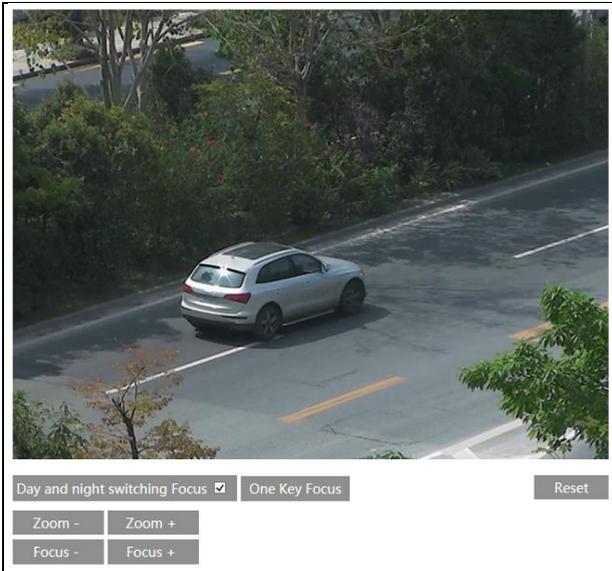


## 4.3 Alarm Configuration

### 4.3.1 Motion Detection

To set motion detection:

1. Go to Config→Alarm→Motion Detection to set motion detection alarm. Check “Enable” check box to activate motion based alarms. If unchecked, the camera will not send out any signals to trigger motion-based recording to the NVR or CMS, even if there is motion in the video.

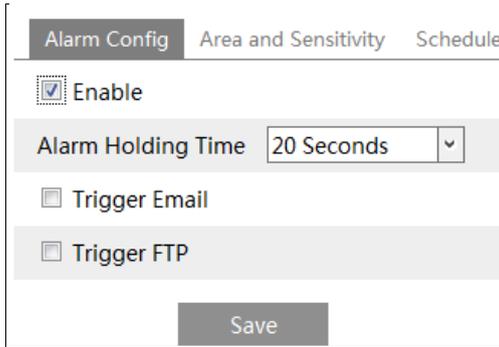

Then select the alarm holding time and set the alarm trigger options.

**Alarm Out:** If selected, this would trigger an external relay output that is connected to the camera on detecting a motion based alarm (**this function is only available for the model with alarm output connector**).


**Trigger Snap:** If selected, the system will capture images on motion detection and save the images on an SD card.

**Trigger SD Recording:** If selected, video will be recorded on an SD card on motion detection.

**Trigger Email:** If “Trigger Email” and “Attach Picture” are checked (email address must be set first in the Email configuration interface), the captured pictures and triggered event will be sent into those addresses.

**Trigger FTP:** If “Trigger FTP” and “Attach Picture” are checked, the captured pictures will be sent into FTP server address. Please refer to FTP configuration chapter for more details.

2. Set motion detection area and sensitivity. Click the “Area and Sensitivity” tab to go to the interface as shown below.

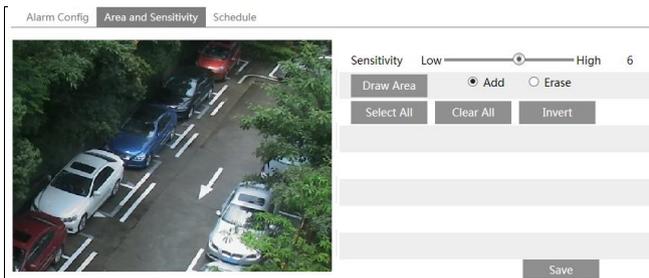


Move the “Sensitivity” scroll bar to set the sensitivity. Higher sensitivity value means that motion will be triggered more easily.

Select “Add” and click “Draw”. Drag the mouse to draw the motion detection area;

Select “Erase” and drag the mouse to clear motion detection area.

After that, click “Save” to save the settings.

3. Set the schedule of the motion detection. Click the “Schedule” tab to go to the interface as shown below.

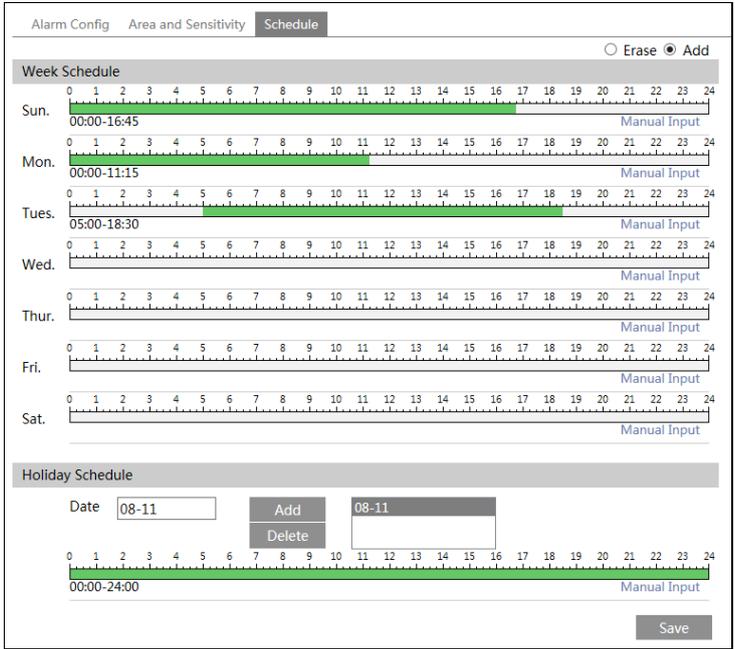

**Weekly schedule**

Set the alarm time from Monday to Sunday for a single week. Each day is divided in one hour increments. Green means scheduled. Blank means unscheduled. Note that if a specific time period is not scheduled for motion, the camera will not generate a motion alarm even if motion is enabled.

“Add”\*: Add the schedule for a special day. Drag the mouse to set the time on the timeline.

“Erase”\*: Delete the schedule. Drag the mouse to erase the time on the timeline.

Manual Input: Click it for a specific day to enter specific start and end times. This adds more granularities (minutes).

**Day schedule**

Set the alarm time for alarm a special day, such as a holiday.

**Note: Holiday schedule takes priority over Weekly schedule.**

**4.3.2 Alarm Server**

Go to Alarm→Alarm Server interface as shown below.

Set the server address, port, heartbeat and heartbeat interval. When an alarm occurs, the camera will transfer the alarm event to the alarm server. If an alarm server is not needed, there is no need to configure this section.

Server Address	<input type="text"/>
Port	<input type="text" value="0"/>
Heartbeat	<input type="text" value="Disable"/> ▾
Heartbeat interval	<input type="text" value="30"/> Second

## 4.4 Event Configuration

**(Only some specified versions support the following functions).**

For more accuracy, here are some recommendations for installation.

- Cameras should be installed on stable surfaces, as vibrations can affect the accuracy of detection.
- Avoid pointing the camera at the reflective surfaces (like shiny floors, mirrors, glass, lake surfaces and so on).
- Avoid places that are narrow or have too much shadowing.
- Avoid scenario where the object's color is similar to the background color.
- At any time of day or night, please make sure the image of the camera is clear and with adequate and even light, avoiding overexposure or too much darkness on both sides.

### 4.4.1 Object Removal

Alarms will be triggered when the objects are removed from or left at the pre-defined area.

To set object removal:

Go to Config→Event→Object Removal interface as shown below.

Detection Config
Area
Schedule

Enable

Enable Left Detection

Enable Item Missing Detection

Alarm Holding Time  ▾

Trigger Email


Trigger FTP

1. Enable object removal detection and then select the detection type.

**Enable Left Detection:** Alarms will be triggered if there are items left in the pre-defined area.

**Enable Item Missing Detection:** Alarms will be triggered if there are items missing in the pre-defined area.

2. Set the alarm holding time and alarm trigger options. The setup steps are the same as motion detection. Please refer to [motion detection](#) chapter for details.
3. Click “Save” button to save the settings.
4. Set the alarm area of the object removal detection. Click the “Area” tab to go to the interface as shown below.

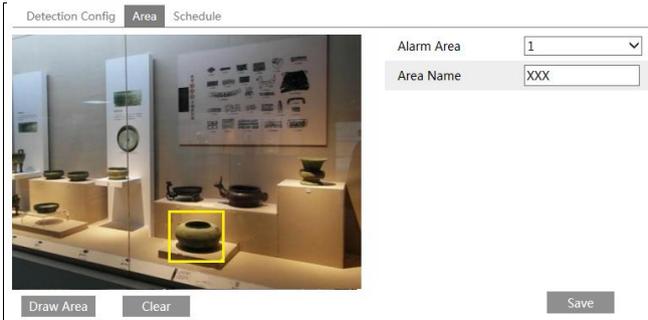

Set the alarm area number and then enter the desired alarm area name. Only one alarm area can be added. Click the “Draw Area” button and then click around the area where you want to set as the alarm area in the image (the alarm area should be a closed area). Click the “Stop Draw” button to stop drawing. Click the “Clear” button to delete the alarm area. Click the “Save” button to save the settings.

5. Set the schedule of the object removal detection. The setup steps of the schedule are the same as motion detection schedule setup (See [Schedule Recording](#)).

※ **The configuration requirements of camera and surrounding areas**


1. The range of the detection object should occupy from 1/50 to 1/3 of the entire image.
2. The detection time of objects in the camera shall be from 3 to 5 seconds.
3. The defined area cannot be covered frequently and continuously (like people and traffic flow).
4. It is necessary for object removal detection that the drawn frame must be very close to the margin of the object in enhancing the sensitivity and accuracy of the detection.
5. Object removal detection cannot determine the objects’ ownership. For instance, there is an unattended package in the station. Object removal detection can detect the package itself but it cannot determine to whom it belongs to.
6. Try not to enable object removal detection when light changes greatly in the scene.
7. Try not to enable object removal detection if there are complex and dynamic environments in the scene.
8. Adequate light and clear scenery are very important to object removal detection.

### 4.4.2 Exception

This function can detect changes in the surveillance environment affected by the external factors.

To set exception detection:

Go to Config→Event→Exception interface as shown below.

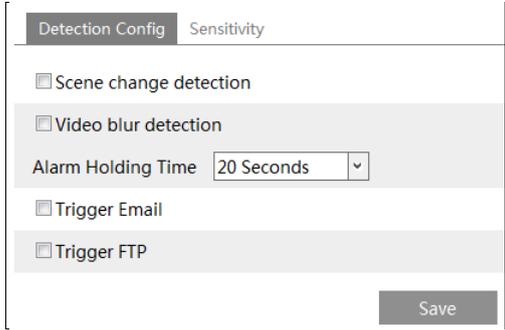

1. Enable the applicable detection that is desired.


**Scene Change Detection:** Alarms will be triggered if the scene of the monitor video has changed.

**Video Blur Detection:** Alarms will be triggered if the video becomes blurry.

2. Set the alarm holding time and alarm trigger options. The setup steps are the same as motion detection. Please refer to motion detection chapter for details.

3. Click “Save” button to save the settings.

4. Set the sensitivity of the exception detection. Click “Sensitivity” tab to go to the interface as shown below.

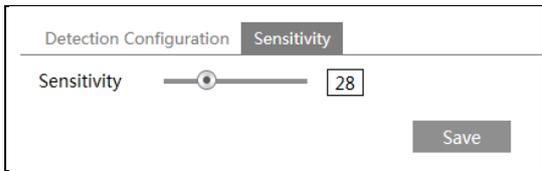

Drag the slider to set the sensitivity value or directly enter the sensitivity value in the textbox. Click “Save” button to save the settings.

**The sensitivity value of Scene Change Detection:** The higher the value is, the more sensitive the system responds to the amplitude of the scene change.

**The sensitivity value of Video Blur Detection:** The higher the value is, the more sensitive the system responds to the blurriness of the image.

※ **The requirements of camera and surrounding area**


1. Auto-focusing function should not be enabled for exception detection.
2. Try not to enable exception detection when light changes greatly in the scene.
3. Please contact us for more detailed application scenarios.

### 4.4.3 Line Crossing


**Line Crossing:** Alarms will be triggered if someone or something crosses the pre-defined

alarm lines.

Go to Config→Event→Line Crossing interface as shown below.

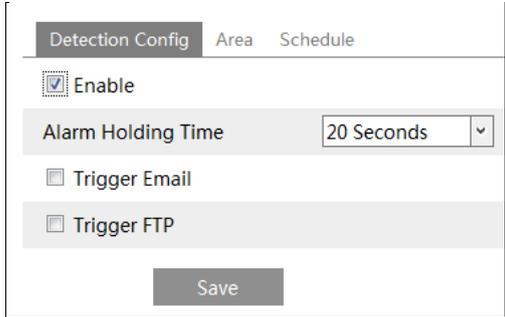

1. Enable line crossing alarm and set the alarm holding time.
2. Set alarm trigger options. The setup steps are the same as motion detection. Please refer to [motion detection](#) chapter for details.
3. Click “Save” button to save the settings.
4. Set area and sensitivity of the line crossing alarm. Click the “Area and Sensitivity” tab to go to the interface as shown below.

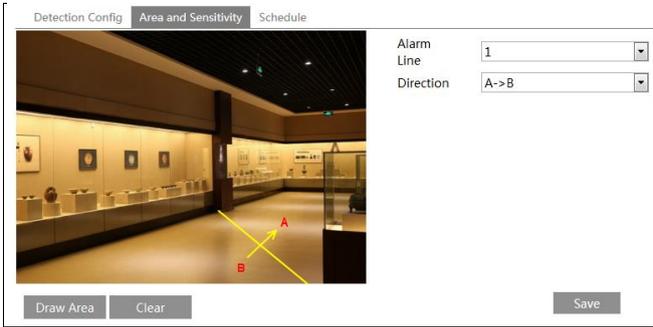

Set the alarm line number and direction. Only one line can be added. Multiple lines cannot be added simultaneously.

**Direction:** A<->B, A->B and A<-B optional. This indicates the direction of the intruder who crosses over the alarm line that would trigger the alarm.

**A<->B:** The alarm will be triggered when the intruder crosses over the alarm line from B to A or from A to B.

**A->B:** The alarm will be triggered when the intruder crosses over the alarm line from A to B.

**A<-B:** The alarm will be triggered when the intruder crosses over the alarm line from B to A.

Click the “Draw Area” button and then drag the mouse to draw a line in the image. Click the “Stop Draw” button to stop drawing. Click the “Clear” button to delete the lines. Click the “Save” button to save the settings.

5. Set the schedule of the line crossing alarm. The setup steps of the schedule are the same as

motion detection schedule setup (See [Schedule Recording](#)).


※ **Configuration of camera and surrounding area**

1. Auto-focusing function should not be enabled for line crossing detection.
2. Avoid the scenes with many trees or the scenes with various light changes (like many flashing headlights). The ambient brightness of the scenes shouldn't be too low.
3. Cameras should be mounted at a height of 2.8 meters or above.
4. Keep the mounting angle of the camera at about 45°.
5. The detected objects should not be less than 1% of the entire image and the largest sizes of the detected objects should not be more than 1/8 of the entire image.
6. Make sure cameras can view objects for at least 2 seconds in the detected area for accurate detection.
7. Adequate light and clear scenery are crucial for line crossing detection.


#### 4.4.4 Intrusion

**Intrusion:** Alarms will be triggered if someone or something intrudes into the pre-defined areas. This function can be applicable to important supervision places, danger areas and prohibited areas, like military administrative zones, house breaking, scenic high danger areas, no man's areas, etc.

Go to Config→Event→Intrusion interface as shown below.

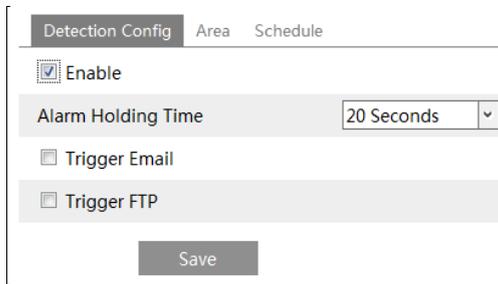

1. Enable region intrusion detection alarm and set the alarm holding time.
2. Set alarm trigger options. The setup steps are the same as motion detection. Please refer to [motion detection](#) chapter for details.
3. Click the “Save” button to save the settings.
4. Set the alarm area of the intrusion detection. Click the “Area” tab to go to the interface as shown below.

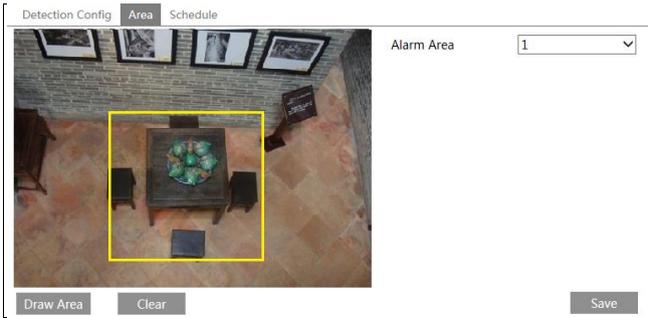

Set the alarm area number on the right side. Only one alarm area can be added. Click the “Draw Area” button and then click around the area where you want to set as the alarm area in the image on the left side (the alarm area should be a closed area). Click the “Stop Draw” button to stop drawing. Click the “Clear” button to delete the alarm area. Click the “Save” button to save the settings.

5. Set the schedule of the intrusion detection. The setup steps of the schedule are the same as motion detection schedule setup (See [Schedule Recording](#)).

※ **Configuration requirements of camera and surrounding area**

1. Auto-focusing function should not be enabled for intrusion detection.
2. Avoid the scenes with many trees or the scenes with various light changes (like many flashing headlights). The ambient brightness of the scenes shouldn't be too low.
3. Cameras should be mounted at a height of 2.8 meters or above.
4. Keep the mounting angle of the camera at about 45°.
5. The detected objects should not be less than 1% of the entire image and the largest sizes of the detected objects should not be more than 1/8 of the entire image.
6. Make sure cameras can view objects for at least 2 seconds in the detected area for accurate detection.
7. Adequate light and clear scenery are crucial to line crossing detection.

## 4.5 Network Configuration

### 4.5.1 TCP/IP

Go to Config→Network→TCP/IP interface as shown below. There are two ways for network connection.

**Use IP address (take IPv4 for example)**-There are two options for IP setup: obtain an IP address automatically by DHCP protocol and use the following IP address. Please choose one of the options as needed.

**Test:** Test the effectiveness of the IP address by clicking this button.

**Use PPPoE**-Click the “PPPoE Config” tab to go to the interface as shown below. Enable PPPoE and then enter the user name and password from your ISP.

Either method of network connection can be used. If PPPoE is used to connect internet, the camera will get a dynamic WAN IP address. This IP address will change frequently. To be notified, the IP change notification function can be used.

Click “IP Change Notification Config” to go to the interface as shown below.

**Trigger Email:** when the IP address of the device is changed, the new IP address will be sent to the email address that has been set up.

**Trigger FTP:** when the IP address of the device is changed, the new IP address will be sent to FTP server that has been set up.

### 4.5.2 Port

Go to Config→Network→Port interface as shown below. HTTP port, Data port and RTSP port can be set.

HTTP Port	<input type="text" value="80"/>
HTTPS Port	<input type="text" value="443"/>
Data Port	<input type="text" value="9008"/>
RTSP Port	<input type="text" value="554"/>

**HTTP Port:** The default HTTP port is 80. It can be changed to any port which is not occupied.

**HTTPS Port:** The default HTTPS port is 443. It can be changed to any port which is not occupied.

**Data Port:** The default data port is 9008. Please change it as needed.

**RTSP Port:** The default port is 554. Please change it as needed.

### 4.5.3 Server Configuration

This function is mainly used for connecting network video management system.

Port	Server	DDNS	802.1X	RTSP	UPnP	Email	FTP	HTTPS	QoS
<input checked="" type="checkbox"/> Enable									
Server Port	<input type="text" value="2009"/>								
Server Address	<input type="text"/>								
Device ID	<input type="text" value="1"/>								

1. Check “Enable”.
2. Check the IP address and port of the transfer media server in the CMS/VMS. Then enable the auto report in the CMS/VMS when adding a new device. Next, enter the remaining information of the device in the CMS/VMS. After that, the system will automatically allot a device ID. Please check it in the CMS/VMS.
3. Enter the above-mentioned server address, server port and device ID in the corresponding boxes. Click the “Save” button to save the settings.

### 4.5.4 DDNS

If the camera is set up with a DHCP connection, DDNS should be set for the internet.

1. Go to Config→Network→ DDNS.

Port	Server	<b>DDNS</b>	802.1X	RTSP	UPnP	Email	FTP	QoS
<input checked="" type="checkbox"/> Enable								
Server Type		www.xcelddns.com						
User Name		<input type="text"/>						
Password		<input type="password"/>						
Domain		<input type="text"/>						
<input type="button" value="Save"/>								

2. Apply for a domain name. Enter [www.xcelddns.com](http://www.xcelddns.com) in the browser web address bar to visit the website. Then click the “Registration” button.

NEW USER REGISTRATION	
USER NAME	<input type="text" value="xxxx"/>
PASSWORD	<input type="password" value="•••••"/> ?
PASSWORD CONFIRM	<input type="password" value="•••••"/>
FIRST NAME	<input type="text" value="xxx"/>
LAST NAME	<input type="text" value="xxx"/>
SECURITY QUESTION.	My first phone number. ▾
ANSWER	<input type="text" value="xxxxxxxx"/>
CONFIRM YOU'RE HUMAN	 New Captcha <input type="text"/> Enter the text you see above
<input type="button" value="Submit"/> <input type="button" value="Reset"/>	

Create domain name.

*You must create a domain name to continue.*

Domain name must start with (a-z, 0-9). Cannot end or start, but may contain a hyphen and is not case-sensitive.

<input type="text"/>	xcelddns.com ▾	<input type="button" value="Request Domain"/>
----------------------	----------------	---

After the domain name is successfully applied for, the domain name will be listed as below.



3. Enter the username, password, domain you apply for in the DDNS configuration interface.
4. Click the “Save” button to save the settings.


### 4.5.5 802.1x

IEEE802.X which is an access control protocol manages devices in connection with the local network by authentication. The setup steps are as follows:

<input checked="" type="checkbox"/> Enable	
Protocol Type	EAP_MD5
EAPOL Version	1
User Name	test
Password	•••••
Confirm Password	•••••

To use this function, the camera should be connected to a switch supporting 802.1x protocol. The switch can be reckoned as an authentication system to identify the device in a local network. If the camera connected to the network interface of the switch has passed the authentication of the switch, it can be accessed via the local network. Protocol type and EAPOL version: Please use the default settings. User name and password: The user name and password must be the same with the user name and password applied for and registered in the authentication server.

The structure of 802.1x

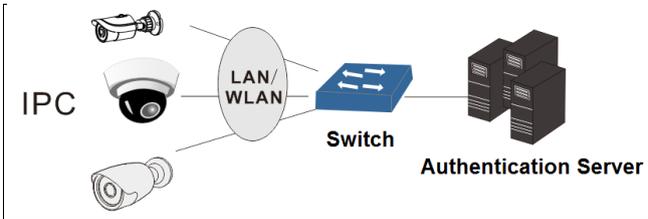

- ① The network camera initiates the authentication of 802.1x protocol via web client and then the authentication is received by the switch supporting 802.1x protocol.
- ② The switch provides the camera with a physical or logic local network interface and verifies

the camera.

③ Authentication server provides the entity of authentication service for the switch, stored the relative information of web client, realizing the authentication of web client. Please refer to the user manual of the connected switch for more details.

### 4.5.6 RTSP

Go to Config→Network→RTSP.

The screenshot shows the RTSP configuration page. At the top, there is a checkbox labeled 'Enable'. Below it is a 'Port' field with the value '554'. The 'Address' section contains three input fields with the placeholder text 'rtsp://IP or domain name:port/profile1', 'rtsp://IP or domain name:port/profile2', and 'rtsp://IP or domain name:port/profile3'. The 'Multicast address' section has four rows: 'Main stream' (IP: 239.0.0.0, Port: 50554), 'Sub stream' (IP: 239.0.0.1, Port: 51554), 'Third stream' (IP: 239.0.0.2, Port: 52554), and 'Audio' (IP: 239.0.0.3, Port: 53554). Each row has an 'Automatic start' checkbox. At the bottom, there is a checkbox for 'Allow anonymous login (No username or password required)' and a 'Save' button.

Select “Enable” to enable the RTSP function.

**Port:** Access port of the streaming media. The default number is 554.

**RTSP Address:** The RTSP address (unicast) format that can be used to play the stream in a media player.

#### Multicast Address

**Main stream:** The address format is

“rtsp://IP address: rtsp port/profile1?transportmode=mcast”.

**Sub stream:** The address format is

“rtsp://IP address: rtsp port/profile2?transportmode=mcast”.

**Third stream:** The address format is

“rtsp://IP address: rtsp port/profile3?transportmode=mcast”.

If “auto start” is enabled, the multicast received data should be added into a VLC player to play the video.

If “Allow anonymous login...” is checked, there is no need to enter the username and password to view the video.

**Note:** 1. This camera support local play through a VLC player. Enter the RTSP address (unicast or multicast, eg. rtsp://192.168.226.201:554/profile1?transportmode=mcast) in a VLC player to realize the simultaneous play with the web client.

2. The IP address mentioned above cannot be the address of IPV6.
3. Avoid the use of the same multicast address in the same local network.
4. When playing the video through the multicast streams in a VLC player, please pay

attention to the mode of the VLC player. If it is set to TCP mode, the video cannot be played.

5. If the coding format of the video of the main stream is MJPEG, the video may be disordered at some resolutions.

### 4.5.7 UPnP

If this function is enabled, the camera can be quickly accessed through the LAN.

Go to Config→Network→UPnP. Enable UPnP and then enter UPnP name.

Port Server DDNS 802.1X RTSP **UPnP** Email FTP HTTPS QoS

Enable

UPnP Name

Save

### 4.5.8 Email

If you need to trigger Email when an alarm happens or IP address is changed, please set the Email here first.

Go to Config→Network →Email.

**Sender**

Sender Address

User Name

Password

Server Address

Secure Connection

SMTP Port  Default

Send Interval(S)  (0-3600)

Clear Test

**Recipient**

Recipient Address

Add Delete

Save

**Sender Address:** sender e-mail address.

**User name and password:** sender user name and password.

**Server Address:** The SMTP IP address or host name.

Select the secure connection type at the “Secure Connection” pull-down list according to what’s

required.

**SMTP Port:** The SMTP port.

**Send Interval(S):** The time interval of sending email. For example, if it is set to 60 seconds and multiple motion detection alarms are triggered within 60 seconds, they will be considered as only one alarm event and only one email will be sent. If one motion alarm event is triggered and then another motion detection alarm event is triggered after 60 seconds, two emails will be sent. When different alarms are triggered at the same time, multiple emails will be sent separately.

Click the “Test” button to test the connection of the account.

**Recipient Address:** receiver’s e-mail address.

### 4.5.9 FTP

After an FTP server is set up, captured pictures from events will be uploaded to the FTP server. Go to Config→Network →FTP.

Server Name	Server Address	Port	User Name	Upload Path
<div style="border: 1px solid gray; padding: 10px; width: fit-content; margin: auto;"><div style="display: flex; justify-content: space-between;"><span>Add FTP</span><span>×</span></div><div style="margin-top: 10px;"><p>Server Name <input type="text"/></p><p>Server Address <input type="text"/></p><p>Upload Path <input type="text" value="Example/Dir/folder"/></p><p>Port <input type="text" value="21"/></p><p>User Name <input type="text"/> <input type="checkbox"/> Anonymous</p><p>Password <input type="password"/></p><div style="display: flex; justify-content: center; gap: 20px; margin-top: 10px;"><span>OK</span><span>Cancel</span></div></div></div>				
<div style="display: flex; justify-content: center; gap: 10px; margin-top: 10px;"><span>Add</span><span>Modify</span><span>Delete</span><span>Test</span><span>Save</span></div>				

**Server Name:** The name of the FTP server.

**Server Address:** The IP address or domain name of the FTP.

**Upload Path:** The directory where files will be uploaded to.

**Port:** The port of the FTP server.

**Use Name and Password:** The username and password that are used to login to the FTP server.

### 4.5.10 HTTPS

HTTPS provides authentication of the web site and protects user privacy.

Go to Config Config→Network→HTTPS as shown below.

Enable

Certificate installed: C=CN, ST=GD, L=SZ, O=embeddedssoftwar [Delete]

Attribute: Issued to: C=CN, ST=GD, L=SZ, O=embeddedssoftware, OU=IPC, H=localhost, E=com.cn, Issuer: C=CN, ST=GD, L=SZ, O=embeddedssoftware, OU=IPC, H=localhost, E=com.cn, Validity date: 2017-07-26 01:02:07 ~ 2022-07-26 01:02:07

[Save]

There is a certificate installed by default as shown above. Enable this function and save it. Then the camera can be accessed by entering https://IP: https port via the web browser (eg. https://192.168.226.201:443).

A private certificate can be created if users don't want to use the default one. Click "Delete" to cancel the default certificate. Then the following interface will be displayed.

Enable

Installation type:  Have signed certificate, install directly  
 Create a private certificate  
 Create a certificate request

Install certificate: [Browse] [Install]

[Save]

- \* If there is a signed certificate, click "Browse" to select it and then click "Install" to install it.
- \* Click "Create a private certificate" to enter the following creation interface.

Enable

Installation type:  Have signed certificate, install directly  
 Create a private certificate  
 Create a certificate request

Create a private certificate: [Create]

[Save]

Click the "Create" button to create a private certificate. Enter the country (only two letters available), domain (camera's IP address/domain), validity date, password, province/state, region and so on. Then click "OK" to save the settings.

- \* Click "Create a certificate request" to enter the following interface.

Enable

Installation type:  Have signed certificate, install directly  
 Create a private certificate  
 Create a certificate request

Create a certificate request: [Create] [Download] [Delete]

Click “Create” to create the certificate request. Then download the certificate request and submit it to the trusted certificate authority for signature. After receiving the signed certificate, import the certificate to the device.

### 4.5.11 P2P (Optional)

Only some specified versions support this function. If this function is enabled, the network camera can be quickly accessed by adding the device ID in mobile surveillance client or CMS/VMS client via WAN. Enable this function by going to Config→Network→P2P interface.

P2P
 

Save

### 4.5.12 QoS

QoS (Quality of Service) function is used to provide different quality of services for different network applications. Under the deficient bandwidth, the router or switch will sort the data streams and transfer them according to their priority to solve the network delay and network congestion by using this function.

Go to Config→Network→QoS.

Video/Audio DSCP	13
Alarm DSCP	35
Manager DSCP	53

Video/Audio DSCP: The range is from 0 to 63.

Alarm DSCP: The range is from 0 to 63.

Manager DSCP: The range is from 0 to 63.

Generally speaking, the larger the number is, the higher the priority is.

## 4.6 Security Configuration

### 4.6.1 User Configuration

Go to Config→Security→User interface as shown below.

Add    Modify    Delete			
Index	User Name	User Type	Binding MAC
1	admin	Administrator	

#### Add user:

1. Click the “Add” button to pop up the following textbox.

The 'Add User' dialog box features a title bar with a close button (X). The main area contains the following elements:

- User Name:** A text input field.
- Password:** A text input field.
- Confirm Password:** A text input field.
- User Type:** A dropdown menu currently showing 'Administrator'.
- Bind MAC:** A text input field containing '00:00:00:00:00:00' and an unchecked checkbox to its right.

At the bottom center, there are two buttons: 'OK' and 'Cancel'.

2. Enter user name in “User Name” textbox.
3. Enter letters or numbers in “Password” and “Confirm Password” textbox.
4. Choose the user type. Administrator has all permissions. Normal user can only view the live video. Advanced user has the same permissions as an Administrator except for; user, backup settings, factory reset, and upgrading the firmware.
5. Enter the MAC address of the PC in “Bind MAC” textbox.  
If this option is enabled, only the PC with the specified MAC address can access the camera for that user.
6. Click the “OK” button and then the newly added user will be displayed in the user list.

**Modify user:**

1. Select a user to modify password and MAC address if necessary in the user configuration list box.
2. The “Edit user” dialog box pops up by clicking the “Modify” button.

The 'Edit User' dialog box features a title bar with a close button (X). The main area contains the following elements:

- Modify Password:** A checked checkbox.
- User Name:** A text input field containing 'admin'.
- Old Password:** A text input field.
- New Password:** A text input field.
- Confirm Password:** A text input field.
- Bind MAC:** A text input field containing '00:00:00:00:00:00' and an unchecked checkbox to its right.

At the bottom center, there are two buttons: 'OK' and 'Cancel'.

3. Enter the old password of the user in the “Old Password” text box.
4. Enter the new password in the “New password” and “Confirm Password” text box.
5. Enter computer’s MAC address as necessary.

6. Click the “OK” button to save the settings.

**Note:** To change the access level of a user, the user must be deleted and added again with the new access level.

**Delete user:**

1. Select the user to be deleted in the user configuration list box.
2. Click the “Delete” button to delete the user.

**Note:** The default administrator account cannot be deleted.

### 4.6.2 Online User

Go to Config→Security→Online User. View the user who is viewing the live video.

Index	Client Address	Port	User Name	User Type	
1	192.168.17.232	55760	admin	Administrator	Click Out

An administrator user can kick out all the other users (including other administrators). Once the user is kicked out, it will be added into the block list.

### 4.6.3 Block and Allow Lists

Go to Config→Security→Block and Allow Lists as shown below.

The setup steps are as follows:

Check the “Enable address filtering” check box.

Select “Block/Allow the following address”, IPv4/IPv6/MAC and then enter IP address or MAC address in the address box and click the “Add” button.

### 4.6.4 Security Management

Go to Config→Security→Security Management as shown below.

In order to prevent against malicious password unlocking, “locking once illegal login” function can be enabled here. If this function is enabled, login failure after trying six times will make the login interface locked. The camera can be logged in again after a half hour or after the camera reboots.

For some specified versions, anonymous login with a private protocol can be enabled here (if your camera doesn't support this function, please skip the following instructions). If this function is enabled, enter http://host:port/Anonymous/1[2/3] (eg.

http://192.168.226.201:80/Anonymous/1) via web browser to access the camera. 1 indicates main stream; 2 indicates sub stream; 3 indicates third stream. Only video can be viewed by this means and no other operations can be done.

## 4.7 Maintenance Configuration

### 4.7.1 Backup and Restore

Go to Config→Maintenance→Backup & Restore.

**Import Setting**

Path

**Export Settings**

**Default Settings**

Keep

Network Config

Security Configuration

Image Configuration

- **Import & Export Settings**

Configuration settings of the camera can be exported from a camera into another camera.

1. Click “Browse” to select the save path for import or export information on the PC.
2. Click the “Import Setting” or “Export Setting” button.

- **Default Settings**

Click the “Load Default” button to restore all system settings to the default factory settings

except those you want to keep.

### 4.7.2 Reboot

Go to Config→Maintenance→Reboot.


Click the “Reboot” button to reboot the device.

#### Timed Reboot Setting:

If necessary, the camera can be set up to reboot on a time interval. Enable “Time Settings”, set the date and time and then Click the “Save” button to save the settings.

### 4.7.3 Upgrade

Go to Config→Maintenance→Upgrade. In this interface, the camera firmware can be updated.

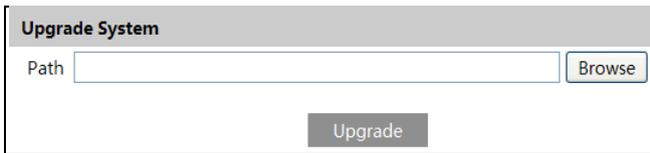

1. Click the “Browse” button to select the save path of the upgrade file
2. Click the “Upgrade” button to start upgrading the firmware.
3. The device will restart automatically

**Caution!** Do not close the browser or disconnect the camera from the network during the upgrade.

### 4.7.4 Operation Log

To query and export log:


1. Go to Config→Maintenance→Operation Log.

Index	Time	Main Type	Sub Type	User Name	Login IP
1	2015-07-14 11:15:18	Operation	Log in	admin	192.168.12.53
2	2015-07-14 11:12:02	Exception	Disconnected		192.168.12.53
3	2015-07-14 19:12:17	Exception	Disconnected		192.168.12.52


2. Select the main type, sub type, start and end time.
3. Click “Search” to view the operation log.
4. Click “Export” to export the operation log.

## 5.1 Image Search

Click Search to go to the interface as shown below. Images that are saved on the SD card can be found here.

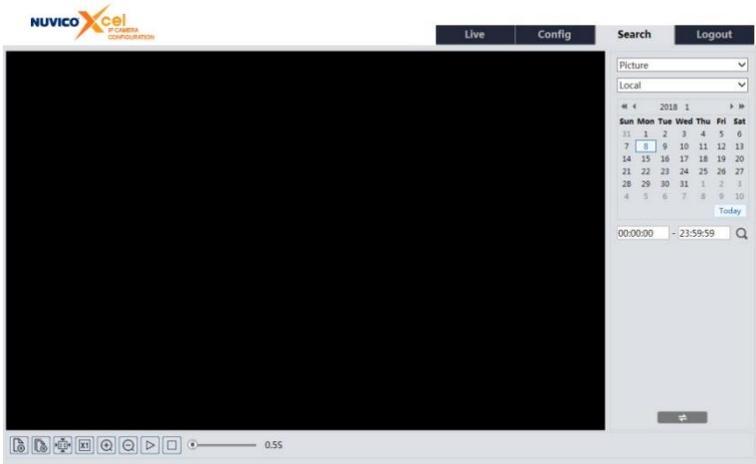


1. Choose “Picture”—“Local”.
2. Set time: Select date and choose the start and end time.
3. Click  to search the images.
4. Double click a file name in the list to view the captured photos as shown above.

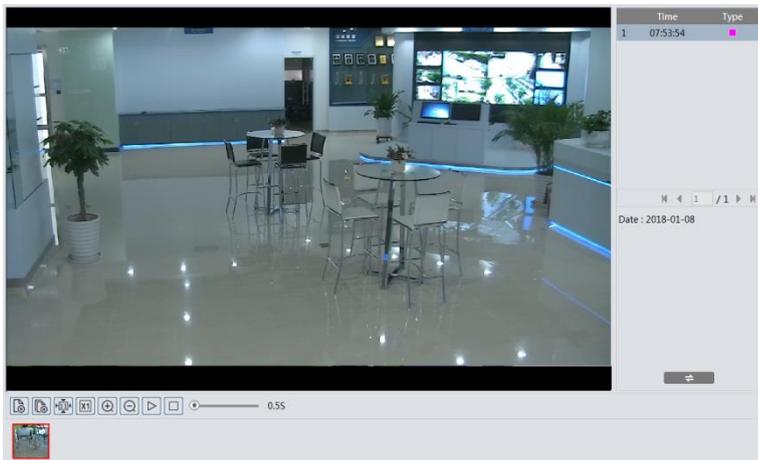


Click  to return to the previous interface.

The descriptions of the buttons are shown as follows.


Icon	Description	Icon	Description
	Close: Select an image and click this button to close the image.		Close all: Click this button to close all images.
	Fit size: Click to fit the image on the screen.		Actual size: Click this button to display the actual size of the image.
	Zoom in: Click this button to digitally zoom in.		Zoom out: Click this button to digitally zoom out.
	Slide show play: Click this button to start the slide show mode.		Stop: Click this button to stop the slide show.
	Play speed: Play speed of the slide show.		

## 5.2 Video Search

Click Search to go to the interface as shown below. Videos were recorded locally to the PC can be played in this interface.

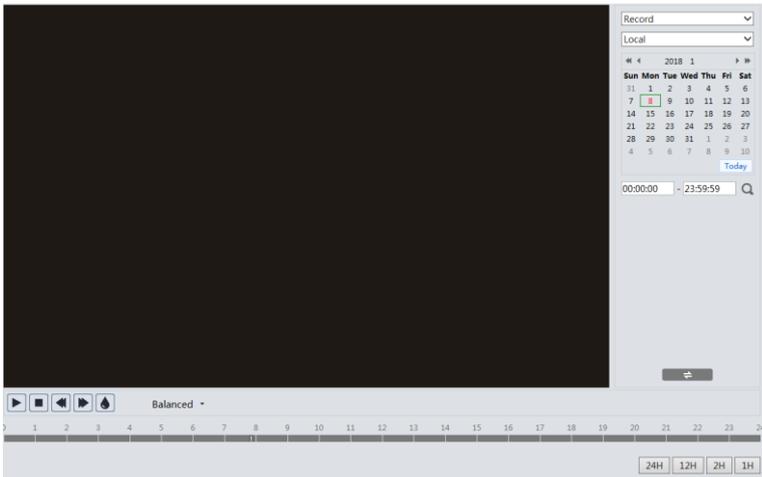

1. Choose “Record”—“Local”.
2. Set search time: Select the date and choose the start and end time.
3. Click  to search the images.
4. Double click on a file name in the list to start playback.

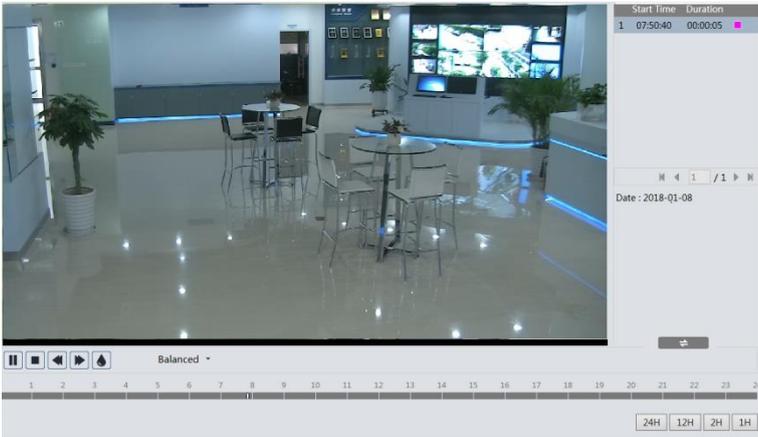

Icon	Description	Icon	Description
	Play button. After pausing the video, click this button to continue playing.		Pause button
	Stop button		Speed down
	Speed up		Watermark display
	Enable / disable audio; drag the slider to adjust the volume after enabling audio. (Only available for the model with built-in MIC)		

## Appendix 1 Q & A

### How to find the password?

A: Reset the device to the default factory settings.

Default IP: 192.168.226.201; User name: admin; Password: 123456

### Fail to connect devices through the web browser.

A: Network is not well connected. Check the connection and make sure it is connected well.

B: IP address is not available. Reset the IP address.

C: Web port number has been changed: contact administrator to get the correct port number.

D: Exclude the above reasons. Restore to default setting by Xcel IP Utility.

### Xcel IP Utility cannot search devices.

It may be caused by the anti-virus software in your computer. Please exit it and try to search device again.

### Web browser cannot download ActiveX control.

A. Web browser may be set up to block ActiveX. Follow the steps below.

① Open web browser and then click Tools-----Internet Options.




② Select Security-----Custom Level....

③ Enable all the options under “ActiveX controls and plug-ins”.

④ Click OK to finish setup.

B. Other plug-ins or anti-virus blocks ActiveX. Please uninstall or close them.

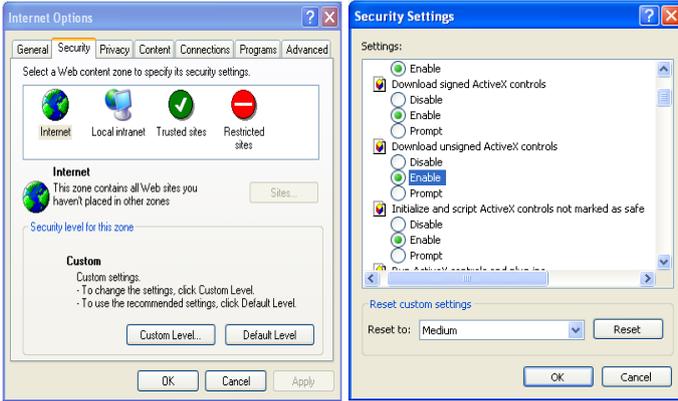

**Q: No sound can be heard.**

A: Audio input device is not connected. Please connect and try again.

B: Audio function is not enabled at the corresponding channel. Please enable this function.

## Appendix 2 Specifications

Specification /Model		 IR Water-proof Bullet Network Camera
Camera	Image Sensor	1/2.7" CMOS
	Image Size	2592 x 1944
	Electronic Shutter	1/25s~1/100000s
	Iris Type	Fixed Iris
	Min. Illumination	0.0085 lux @ F1.2, AGC ON: 0 lux with IR
	Lens	2.8mm @ F1.85, horizontal field of view: 93.4° 2.8-12mm @ F1.4 (motorized lens), horizontal field of view: 90.5°~32.9°
	Day&Night	ICR
	Digital NR	3D DNR
	WDR	Digital WDR
	Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation:0°~360°
Image	Video Compression	H.265/H.264
	H.265 Type	Main Profile @ Level 4.1 High Tier
	Video Bit Rate	64Kbps~5Mbps
	Resolution	5MP (2592 x 1944), 4MP (2560 x 1440), 1080p (1920 x 1080), 720p (1280 x 720), D1, CIF, 480 x 240
	Main Stream	60Hz: 5MP (1~20fps) / 4MP(1~30fps) / 1080p(1~30fps) / 720p(1~30fps) 50Hz: 5MP (1~20fps) / 4MP (1~25fps) / 1080p (1~25fps) / 720p (1~25fps)
	Sub Stream	60Hz: 720p(1~15fps) / D1(1~30fps) / CIF(1~30fps) 50Hz: 720p(1~12fps) / D1(1~25fps) / CIF(1~25fps)
	Third Stream	60Hz:D1/CIF/480 x 240(1~30fps); 50Hz: D1/CIF/480 x 240(1~25fps)
	Image Settings	Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, Anti-flicker, etc. adjustable through client or web browser
	ROI	Support
Interface	Network	RJ45
Fuction	Remote Monitoring	Web browsing, CMS remote control
	Online Connection	Support simultaneous monitoring for up to 4 users and multi-stream transmission
	Network Protocol	IPv4, IPv6, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x,HTTP, HTTPS, QoS
	Interface Protocol	ONVIF
	Storage	Network remote storage
	Smart Alarm	Motion alarm
Others	IR Distance	100~165 ft
	Ingress Protection	IP67
	Power	DC12V/PoE
	Power Consumption	< 9W
	Operating Environment	Temperature: -22°F~140°F Relative humidity: less than 95% (non-condensing)
	Dimensions	8.57" x 3.17" x 3.17"
	Weight (net)	Approx. 1.43 lbs
	Installation	Wall mount; ceiling mount

Specification /Model		 <b>IR Water-proof Dome Network Camera</b>
Camera	Image Sensor	1/2.7" CMOS
	Image Size	2592 x 1944
	Electronic Shutter	1/25s~1/10000s
	Iris Type	Fixed Iris
	Min. Illumination	0.0085lux @ F1.2, AGC ON: 0 lux with IR
	Lens	2.8mm @ F1.85, horizontal field of view: 93.4°
	Day&Night	ICR
	Digital NR	3D DNR
	WDR	Digital WDR
	Angle Adjustment	Pan: 0°~355°; Tilt: 0°~67°; Rotation:0°~355°
Video Compression	H.265/H.264	
Image	H.265 Type	Main Profile @ Level 4.1 High Tier
	Video Bit Rate	64Kbps~5Mbps
	Resolution	5MP (2592 x 1944), 4MP (2560 x 1440), 1080p (1920 x 1080), 720p (1280 x 720), D1, CIF, 480 x 240
	Main Stream	60Hz: 5MP (1~20fps) / 4MP(1~30fps) / 1080p(1~30fps) / 720p(1~30fps) 50Hz:5MP (1~20fps) / 4MP (1~25fps) / 1080p (1~25fps) / 720p (1~25fps)
	Sub Stream	60Hz: 720p(1~15fps) / D1(1~30fps) / CIF(1~30fps) 50Hz: 720p(1~12fps) / D1(1~25fps) / CIF(1~25fps)
	Third Stream	60Hz:D1/CIF/480 x 240(1~30fps); 50Hz: D1/CIF/480 x 240(1~25fps)
	Image Settings	Saturation, Brightness, Chroma, Contrast, Wide Dynamic, HLC, BLC, Sharpen, NR, Anti-flicker, etc. adjustable through client or web browser
	ROI	Support
	Network	RJ45
Interface	Remote Monitoring	Web browsing, CMS remote control
Fuction	Online Connection	Support simultaneous monitoring for up to 4 users and multi-stream transmission
	Network Protocol	IPv4, IPv6, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, HTTP, HTTPS, QoS
	Interface Protocol	ONVIF
	Storage	Network remote storage
	Smart Alarm	Motion alarm
	IR Distance	65~100 ft
Others	Ingress Protection	IP67&IK10
	Power	DC12V/PoE
	Power Consumption	< 6W
	Operating Environment	Temperature: -22°F~140°F Relative humidity: less than 95% (non-condensing)
	Dimensions	Ø 4.68" x 3.46"
	Weight (net)	Approx. 1.32 lbs
	Installation	Ceiling mount (wall mount available with the junction box and bracket)

Specification /Model		 <b>IR Water-proof Dome Network Camera</b>
Camera	Image Sensor	1/2.7" CMOS
	Image Size	2592 x 1944
	Electronic Shutter	1/25s~1/100000s
	Iris Type	Fixed Iris
	Min. Illumination	0.0085lux @ F1.2, AGC ON: 0 lux with IR
	Lens	2.8-12mm @ F1.4 (motorized lens), horizontal field of view: 90.5°~32.9°
	Day&Night	ICR
	Digital NR	3D DNR
	WDR	Digital WDR
	Angle Adjustment	Pan: 0°~345°; Tilt: 0°~77°; Rotation:0°~345°
Video Compression	H.265/H.264	
Image	H.265 Type	Main Profile @ Level 4.1 High Tier
	Video Bit Rate	64Kbps~5Mbps
	Resolution	5MP (2592 x 1944), 4MP (2560 x 1440), 1080p (1920 x 1080), 720p (1280 x 720), D1, CIF, 480 x 240
	Main Stream	60Hz: 5MP (1~20fps) / 4MP(1~30fps) / 1080p(1~30fps) / 720p(1~30fps) 50Hz:5MP (1~20fps) / 4MP (1~25fps) / 1080p(1~25fps) / 720p (1~25fps)
	Sub Stream	60Hz: 720P(1~15fps) / D1(1~30fps) / CIF(1~30fps) 50Hz: 720P(1~12fps) / D1(1~25fps) / CIF(1~25fps)
	Third Stream	60Hz:D1/CIF/480 x 240(1~30fps); 50Hz: D1/CIF/480 x 240(1~25fps)
	Image Settings	Saturation, Brightness, Chroma, Contrast, Wide Dynamic, HLC, BLC, Sharpen, NR, Anti-flicker, etc. adjustable through client or web browser
	ROI	Support
	Network	RJ45
Interface	Remote Monitoring	Web browsing, CMS remote control
Fuction	Online Connection	Support simultaneous monitoring for up to 4 users and multi-stream transmission
	Network Protocol	IPv4, IPv6, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x,HTTP, HTTPS, QoS
	Interface Protocol	ONVIF
	Storage	Network remote storage
	Smart Alarm	Motion alarm
	IR Distance	100~164 ft
Others	Ingress Protection	IP67&IK10
	Power	DC12V/PoE
	Power Consumption	< 10W
	Operating Environment	Temperature: -22°F~140°F Relative humidity: less than 95% (non-condensing)
	Dimension	Ø 5.51" x 3.94"
	Weight (net)	Approx. 1.87 lbs
	Installation	Ceiling mount (wall mount available with the junction box and bracket)

Specification / Model		 IR Water-proof Eyeball Network Camera
Camera	Image Sensor	1/2.7 " CMOS
	Image Size	2592×1944
	Electronic Shutter	1/25s~1/10000s
	Iris Type	Fixed Iris
	Min. Illumination	0.0085lux @ F1.2, AGC ON: 0 lux with IR
	Lens	2.8mm @ F1.85, horizontal field of view: 93.4°
	Day&Night	ICR
	Digital NR	3D DNR
	WDR	Digital WDR
	Angle Adjustment	Pan: 0°~360°; Tilt: 0°~75°; Rotation:0°~360°
Image	Video Compression	H.265/H.264
	H.265 Type	Main Profile @ Level 4.1 High Tier
	Video Bit Rate	64Kbps~5Mbps
	Resolution	5MP (2592 x 1944), 4MP (2560 x 1440), 1080p (1920 x 1080), 720p (1280 x 720), D1, CIF, 480 x 240
	Main Stream	60Hz: 5MP (1~20fps) / 4MP(1~30fps) /1080p(1~30fps) / 720p(1~30fps) 50Hz:5MP (1~20fps) / 4MP (1~25fps) / 1080p(1~25fps) / 720p(1~25fps)
	Sub Stream	60Hz: 720p(1~15fps) / D1(1~30fps) / CIF(1~30fps) 50Hz: 720p(1~12fps) / D1(1~25fps) / CIF(1~25fps)
	Third Stream	60Hz:D1/CIF/480 x 240(1~30fps); 50Hz: D1/CIF/480 x 240(1~25fps)
	Image Settings	Saturation, Brightness, Chroma, Contrast, Wide Dynamic, HLC, BLC, Sharpen, NR, Anti-flicker, etc. adjustable through client or web browser
Interface	ROI	Support
	Network	RJ45
Interface	Audio	Built-in MIC x 1
	Remote Monitoring	Web browsing, CMS remote control
Fuction	Online Connection	Support simultaneous monitoring for up to 4 users and multi-stream transmission
	Network Protocol	IPv4, IPv6, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, HTTP, HTTPS, 802.1x, QoS
	Interface Protocol	ONVIF
	Storage	Network remote storage
	Smart Alarm	Motion alarm
	Others	IR Distance
Ingress Protection		IP67
Power		DC12V/PoE
Power Consumption		< 5W
Operating Environment		Temperature: -22°F~-140°F Relative humidity: less than 95% (non-condensing)
Dimension		Ø 3.72" x 3.26"
Weight (net)		Approx. 1 lb
Installation		Ceiling mount (wall mount available with the junction box and bracket)

Specification /Model		 IR Water-proof Eyeball Network Camera
Camera	Image Sensor	1/2.7 " CMOS
	Image Size	2592 x 1944
	Electronic Shutter	1/25s~1/100000s
	Iris Type	Fixed Iris
	Min. Illumination	0.0085lux @ F1.2, AGC ON: 0 lux with IR
	Lens	2.8-12mm @ F1.4 (motorized lens) horizontal field of view: 90.5°~32.9°
	Day&Night	ICR
	Digital NR	3D DNR
	WDR	Digital WDR
	Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation:0°~360°
Image	Video Compression	H.265/H.264
	H.265 Type	Main Profile @ Level 4.1 High Tier
	Video Bit Rate	64Kbps~5Mbps
	Resolution	5MP (2592 x 1944), 4MP (2560 x 1440), 1080p (1920 x 1080), 720p (1280 x 720), D1, CIF, 480 x 240
	Main Stream	60Hz: 5MP (1~20fps) / 4MP(1~30fps) / 1080p (1~30fps) / 720p(1~30fps) 50Hz: 5MP (1~20fps) / 4MP (1~25fps) / 1080p (1~25fps) / 720p (1~25fps)
	Sub Stream	60Hz: 720P(1~15fps) / D1(1~30fps) / CIF(1~30fps) 50Hz: 720P(1~12fps) / D1(1~25fps) / CIF(1~25fps)
	Third Stream	60Hz:D1/CIF/480 x 240(1~30fps); 50Hz: D1/CIF/480 x 240(1~25fps)
	Image Settings	Saturation, Brightness, Chroma, Contrast, Wide Dynamic, HLC, BLC, Sharpen, NR, Anti-flicker, etc. adjustable through client or web browser
ROI	Support	
Interface	Network	RJ45
	Audio	Built-in MIC x 1
Fuction	Remote Monitoring	Web browsing, CMS remote control
	Online Connection	Support simultaneous monitoring for up to 4 users and multi-stream transmission
	Network Protocol	IPv4, IPv6, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, HTTP, HTTPS, 802.1x, QoS
	Interface Protocol	ONVIF
	Storage	Network remote storage
	Smart Alarm	Motion alarm
Others	IR Distance	100~165 ft
	Ingress Protection	IP67
	Power	DC12V/PoE
	Power Consumption	< 10W
	Operating Environment	Temperature: -22°F~140°F Relative humidity: less than 95% (non-condensing)
	Dimensions	Ø 4.39" x 3.92"
	Weight (net)	Approx. 1.41 lbs
	Installation	Ceiling mount (wall mount available with the junction box and bracket)